OXYPC COMPUTERS

# OxyPC Inventory Lifecycle Design System

Colours, type, layout and components that every page of the app is built from, with the rules for using them.

v2.5

| | |
|---|---|
| Version | 2.5 — 6 November 2026 |
| Applies to | OxyPC Inventory Lifecycle web app (FastAPI + Jinja2 + Bootstrap 5) |
| Based on | Code on branch `staging`, `static/css/app.css`, `static/js/global-table.js` |
| Environments | Production `http://10.199.206.109` · Staging `http://localhost:8001` |
| Audience | Developers, reviewers and Claude sessions building or changing pages |
| What's new | v2.5: five tile types (single, multi, single with secondary counts, surface, parent count) drawn by `templates/_tiles.html` replace the older tiles. v2.4: new logo; spacing, gutters and padding. v2.2: OxyPC × Bluemonk brand colours, Global Table style, app icon |

CONTENTS

# What's inside


| | | |
|---|---|---|
| 01 | Introduction and principles | Why the system exists, five rules |
| 02 | Colour | Brand, semantic, tile and stage colours |
| 03 | Typography, spacing and icons | Type, spacing and gutters, icons, logo |
| 04 | Page layout | Sidebar, top bar, page anatomy |
| 05 | Summary tiles | Single, secondary, double, surface |
| 06 | Filter bar | One-row filters, busy-page grid |
| 07 | Global Table | Table card, toolbar, behaviours |
| 08 | Buttons and badges | Hierarchy, states, stage badges |
| 09 | Forms, modals and feedback | Inputs, dialogs, alerts |
| 10 | Patterns | Permissions, partial refresh, breadcrumbs |
| 11 | Checklist and change process | From idea to production |
| A | Token and file reference | CSS variables, class names, locations |

01

# Introduction and principles

Every OxyPC Inventory Lifecycle page is assembled from the same few parts: summary tiles, a filter bar and a Global Table inside a card. This document records how each part looks and how it is built, so that new pages match the 238 templates already live.

The system sits on Bootstrap 5 with a thin shared layer in `static/css/app.css`. Table behaviour lives in `static/js/global-table.js`. All libraries are served locally from `static/vendor/`, with no CDN, so the app works on the office LAN without internet.

## Five principles

| Principle | What it means in practice |
|---|---|
| **Reuse, don't restyle** | Use the shared classes ( `filter-bar` , `initGlobalTable` , the tile pattern). A fix in `app.css` then reaches every page at once. |
| **Dense but readable** | Tables use 14px text, one-line headers and two-line cell clamps, so 12+ rows fit on a 1366px office screen without wrapping. |
| **Colour carries meaning** | Each colour stands for a stage or state and is used the same way on tiles, badges and buttons. Colour is never decoration. |
| **One row of controls** | Filters and their buttons sit on one line above the table. Row actions sit in the last column, centred. |
| **Permissions decide what shows** | A control appears only for roles that may use it, checked with `has_perm()` or `role_allowed()` . Never a hard-coded role list. |

## How to use this document

- **Building a new page:** read chapters 04–09, then work through the checklist in chapter 11.
- **Changing an existing page:** find the component's chapter. The samples are rendered with the app's real CSS.
- **Reviewing on staging:** compare the page against the specs and the "Do / Don't" boxes.

> **SOURCE OF TRUTH**
> When this document and the code disagree, the code in production wins. Update this document in the same change — its source is `qa_docs/design_system/design_system.html` ; rebuild the PDF with `build_pdf.py` next to it.

02

# Colour

Four groups of colour: the brand colours and neutrals around every page (including the OxyPC greens), Bootstrap's semantic colours for actions and states, tile colours for summary counts, and fixed stage colours for device badges.

## Brand and neutrals UPDATED

**Bluemonk Navy**
`#0e3a7a` --brand-blue
History buttons, table headers, focus rings, sidebar footer, card titles.

**Bluemonk Blue**
`#0377c2` --sidebar-active
Active sidebar link only

**Sky Blue**
`#d9ebf6` —
Global Table card header

**OxyPC Leaf**
`#54BA48` --oxy-leaf
Accents only (logo, icon top) — too light for text

**OxyPC Forest**
`#129042` --oxy-forest
Profit figures ( `.profit-positive` ), icon front

**Mint**
`#E8F5E6` --oxy-mint
Green tile and stat-card background

**Light Colour**
`#f0f4f8` --sidebar-text
Sidebar link text, and the page background behind all content

**Dark Colour**
`#212529` body text
Body text, table cells, form fields

**Disabled**
`#D8D8D8` —
Every disabled button

## Semantic colours

Bootstrap 5 defaults, except Success (OxyPC green), plus three custom badge colours defined in `app.css` (teal, purple, pink).

**Primary**
`#0d6efd` primary
Main actions, QC Check, Active

**Success UPDATED**
`#0F7A37` success
Save, Ready to Sell, done.

**Warning**
`#ffc107` warning
GRN, L1/L2, Returned, pending

**Danger**
`#dc3545` danger
L3, Scrapped, PNA, delete

**Info**
`#0dcaf0` info
Stock In, TRC Production

**Secondary**
`#6c757d` secondary
IQC, Inactive, neutral

**Dark**
`#212529` dark
Sold, Scrap for Sale

**Teal**
`#0d9488` bg-teal
All cosmetic stages

**Purple**
`#6f42c1` bg-purple
Final QC, "at you" counts

**Pink**
`#d63384` bg-pink
Cosmetic summaries

## Tile colours UPDATED

Summary tiles set one variable, `--tc`, and derive their tint, border, number and watermark from it. These are the shades in use. They are darker than Bootstrap's warning and info, which are too pale for coloured text on a light tint. Green tiles sit on mint `#E8F5E6`.

**Blue**
`#0d6efd`
IQC, L1/L2, Active

**Green**
`#0F7A37`
Stock, Final QC, Done

**Orange**
`#fd7e14`
TRC, L3/L4

**Amber**
`#f0ad00`
Price pending (solid tiles)

**Teal**
`#0aa2c0`
Ready to Sell, parts

**Mint**
`#20c997`
Stress

**Red**
`#dc3545`
PNA, failures

**Pink**
`#e83e8c`
Cosmetic

**Purple**
`#6f42c1`
At you

**Grey**
`#6c757d`
Returned, Inactive

## Device stage colours

Fixed in `STAGE_COLORS` ( `models/device.py` ) and read through `device.stage_color`. Never choose a stage colour by hand.

GRN · IQC · Stock In · L1 · L2 · L3 · TRC Production · QC Check · Cosmetic Received · Cleaning · Painting · Cosmetic Completed · Final QC · Final QC Pass Hold · Final QC Fail Hold · Ready to Sale · Sold · Returned · Scrapped · Scrap for Sale

Rendered with the app's badge classes. All cosmetic sub-stages (Putty, Dry Sanding, Masking, Water Sanding) are teal. Success-green stages show the v2.2 solid `#0F7A37` badge.

## Money and profit UPDATED

| Class | Colour | Use |
|---|---|---|
| `.profit-positive` | #129042 ₹12,450 | Profit, positive P&L (was #0f9e4e) |
| `.profit-negative` | #d63031 −₹3,200 | Loss |
| `.profit-zero` | #888 ₹0 | Break-even |

**DO**
Pick a tile or badge colour from what it counts: green for stock and done, orange for repair, red for failures.

**DON'T**
Use a `bg-*` class that isn't in Bootstrap or `app.css`. The badge renders white text on no background.

03

# Typography, spacing and icons

The app uses Segoe UI (Windows), falling back to Arial. The whole interface renders at 90% zoom, so the sizes below are what the CSS says, before that zoom.

## Type scale

| Role | Spec | Sample |
|---|---|---|
| Page title (top bar) | 1.25rem · bold · primary blue | Inventory Manager |
| Tile number | 1.6rem · 700 · tile colour | 3,518 |
| Card title | 1rem · semibold · navy | Inventory Stock |
| Body / table text | 14px · 400 | LOT-042 · Dell Latitude 5490 · i5 8th Gen |
| Table header | 0.8rem · 600 · uppercase · 0.5px tracking | TAG NUMBER |
| Form label / sidebar link | 0.875rem | Device Type |
| Tile label | 0.72rem · #343a40 | Devices in Stock |
| Sidebar section | 0.7rem · 700 · uppercase · 1px tracking | INVENTORY |
| Barcode field | Courier New · 1rem | OXY-2026-004512 |


## Corners, shadow and frame sizes

| Token | Value | Where |
|---|---|---|
| Card and tile radius | 10px | Cards, summary tiles, `.stat-card` |
| Table radius | 0.5em | Tables inside cards (clip-path on scroll tables) |
| Control radius | 6px | Inputs, DataTables search and length controls, sidebar links |
| Shadow | `0 .25rem .5rem rgba(0,0,0,.5)` | `.shadow-sm` is overridden app-wide to this. Use the class, don't write your own |
| Sidebar / top bar | 240px / 56px | `--sidebar-width`, `--topbar-height` |
| App zoom | 0.9 | `--app-zoom`. Use `var(--full-vh)` instead of `100vh` |

## Spacing, gutters and padding NEW

All spacing comes from Bootstrap's spacer scale on a 16 px base; never type pixel margins. The app renders at 90% zoom, so a 16 px gap is 14.4 px on screen.

| Step | Value | CSS px | On screen | Typical use |
|---|---|---|---|---|
| `1` | .25rem | 4 | 3.6 | Icon to text inside badges, tight button groups ( `gap-1` ) |
| `2` | .5rem | 8 | 7.2 | Between buttons and filters ( `gap-2` ), form-field gutter ( `g-2` ), compact card and modal padding ( `py-2` ) |
| `3` | 1rem | 16 | 14.4 | Tile and card gutter ( `g-3` ), card body padding, card stack ( `mb-3` ) |
| `4` | 1.5rem | 24 | 21.6 | Page side padding ( `px-4` ), tiles → filter bar ( `mb-4` ), dashboard gutter ( `g-4` ) |
| `5` | 3rem | 48 | 43.2 | Empty states and login only |

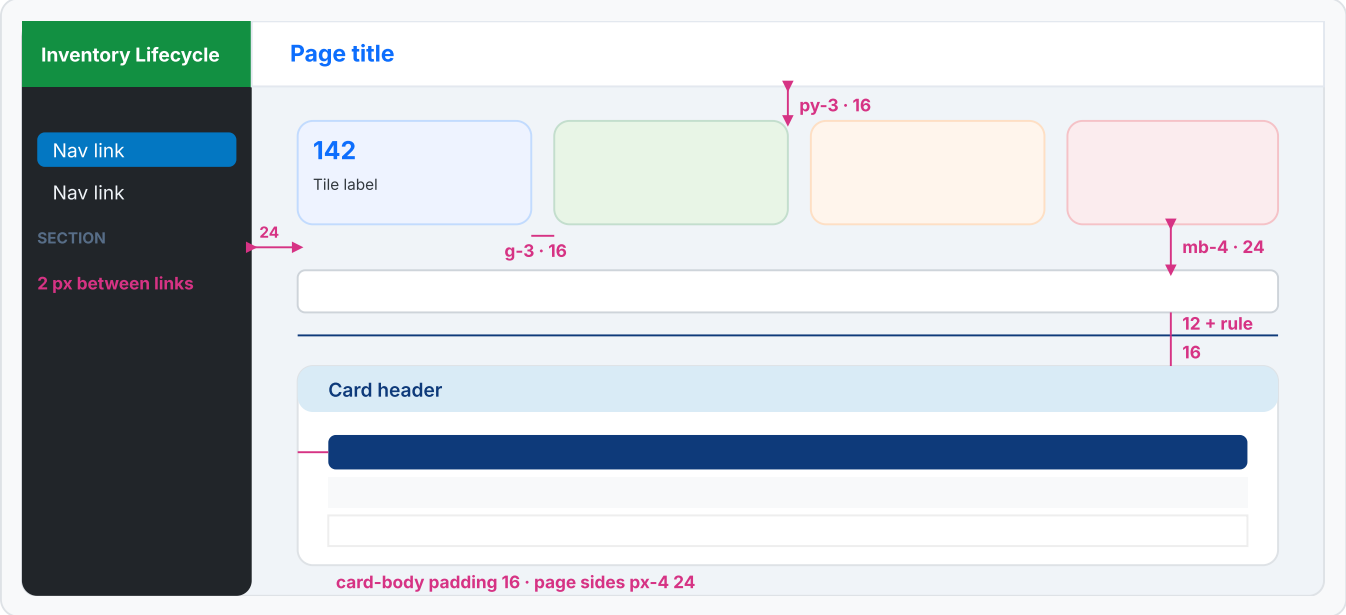


Page anatomy with the real gaps, in CSS px. Pink labels name the class and its size.

| Page frame | |
|---|---|
| Main content | `px-4 py-3` = 24 / 16 |
| Flash messages | `px-4 pt-2` = 24 / 8 |
| Top bar | 56 high, `px-3` = 16 sides |
| Sidebar | 240 wide; list `px-2` = 8 sides, 16 top and bottom |
| Sidebar header | `px-3 py-3` , min 56 high |
| Sidebar link | 7.2 × 12 padding, radius 6, 2 apart |
| Section label | 12 top, 12 sides, 4 bottom |

| Gutters (grid and flex) | |
|---|---|
| Tiles, cards | `row g-3` = 16 (189 uses) |
| Form fields | `row g-2` = 8 (130 uses) |
| Dashboard sections | `row g-4` = 24 |
| Buttons, filters | `gap-2` = 8 (333 uses) |
| Row actions | `gap-1` = 4 |
| Tile rows (flex) | `gap-3` = 16 |
| Filter bar fields | `gap: .5rem` = 8 |

## Component padding NEW

Inside each shared component the padding is fixed. Values in CSS px, before the 90% zoom.

| Component | Padding | Vertical spacing |
|---|---|---|
| Summary tile | `.6rem .7rem` = 9.6 × 11.2; row padding 4 6 10 (keeps the shadow) | Label 5.6 below number, button 9.6 below label; row `mb-4` |
| Filter bar | 12 bottom, then a 1 px Bluemonk Navy rule | `mb` 16 to the card below |
| Card header | `.5em 1em` = 8 × 16 | — |
| Card body | 16 (forced on any card holding a table); compact `py-2` = 8; full-bleed tables `p-0` | Cards stack `mb-3` = 16, or `mb-4` = 24 between sections |
| Global Table cell | 8 all round; first column 16 left; 12 left/right in the card style | Table 6 below its toolbar, 14 below the table |
| Modal | Header and footer 16 (compact `py-2` = 8); body 16 | Fields `mb-3` = 16; two short fields side by side in `row g-2` |
| Alert | `py-2` = 8 high, 16 sides | Above the page content, `mb-3` |
| Buttons | `btn-sm` = 4 × 8; tile button `py-0 px-1` | Icon `me-1` = 4 before the text |
| Empty state | 24 × 16, items 8 apart | — |

**DO**
Use Bootstrap spacing classes ( `p-*` , `m-*` , `g-*` , `gap-*` ) with the steps above. Same component, same spacing on every page.

**DON'T**
Write inline `style="margin:…px"` , mix `g-2` and `g-3` in one tile row, or remove the tile row padding (the shadow gets clipped).

## Icons

Bootstrap Icons only, as `<i class="bi bi-…">`. Use `me-1` before button text and `me-2` before sidebar and card titles. Reuse the icon a module already has in the sidebar.

| | | | |
|---|---|---|---|
| Stock Inwards<br>`bi-archive` | Production<br>`bi-cpu` | IQC<br>`bi-clipboard-check` | In stock<br>`bi-box-seam` |
| Repair / TRC<br>`bi-tools` | Ready to sell<br>`bi-bag-check` | Filter<br>`bi-funnel` | Download<br>`bi-file-earmark-arrow-down` |
| Upload<br>`bi-upload` | Edit<br>`bi-pencil` | Delete / scrap<br>`bi-trash3` | Done<br>`bi-check-circle` |
| Warning / PNA<br>`bi-exclamation-triangle` | Scan<br>`bi-upc-scan` | Assigned to you<br>`bi-person-workspace` | Transfer<br>`bi-arrow-left-right` |

**APP ICON**
The OxyPC logo, its meaning, sizes and rules are on the next page (Logo design and usage).

## Logo design and usage NEW LOGO


The OxyPC Inventory Lifecycle logo is a stock box with rounded corners, drawn in the three OxyPC greens. It carries the whole device journey in one shape: a tick lying on the lid for QC passed and ready to sell, a laptop on the front for the refurbished device, and a van on the side for intake and dispatch. The logo has no tile: the box stands on its own.




| Part | Colour | Stands for |
|---|---|---|
| Lid, with tick | `#54BA48` OxyPC Leaf | QC passed, ready to sell. The tick lies flat on the lid, with a thin deep-green edge under it |
| Front face, with laptop | `#129042` OxyPC Forest | The refurbished device itself |
| Side face, with van | `#0B6B30` Deep green | Intake and dispatch: devices arriving and leaving |
| Symbols | `#FFFFFF` | Line icons, 2.2–2.6 strokes on a 64 grid, round caps |
| Corners | Radius 4.5 of 64 | All six outer corners of the box are rounded |

Drawn on a 64 × 64 grid. The box is isometric (faces at 30°) and sits inside 12–52 horizontally and 9–55 vertically. Light from the top: lid lightest, side darkest. The laptop and van are drawn at 85% so they sit inside their faces with room around them.

### Versions and where they are used







| File | What it is | Used in |
|---|---|---|
| `oxypc-box-dark.svg` | Dark version: green box, white symbols | Default logo: documents, emailers, login page, white and light pages, Navy and Dark backgrounds |
| `oxypc-box-dark-favicon.svg`, `.ico` | Dark version, favicon build: thicker lines, bigger tick, no motion lines | Browser tab (16–32 px) |
| `oxypc-box-light.svg` | Light version: white box, OxyPC Forest symbols | Sidebar header on OxyPC Forest `#129042`, and other green or dark surfaces |
| `static/partner/icon-192/512.png` | Partner portal app icons (separate artwork) | Installed partner app on phones |

| Rule | Spec |
|---|---|
| Minimum size | 16 px. At 32 px and below, use the favicon build |
| Clear space | Keep at least 1/8 of the logo's width empty on every side (12 px around a 96 px logo) |
| Background | Dark version on white, Light `#f0f4f8`, Mint, Bluemonk Navy and Dark. Light version on OxyPC Forest, Navy and Dark; never on white or Light, where the white box disappears |
| Colour | Always the three greens and white (Dark version) or white and Forest (Light version). One-colour use (print, stamps): solid OxyPC Forest `#129042` or solid white |
| Next to the name | Logo height = 1.5× the cap height of "OxyPC Inventory Lifecycle"; gap between them = 1/4 of the logo width |


**DO**
Use the SVG files as they are, scaled evenly. Use the Dark version whenever you are unsure of the background.

**DON'T**
Recolour, stretch, rotate, outline or add effects; put the logo on a tile; stand the tick upright; use the old sharp-cornered box; redraw the logo in CSS or as an icon font.

04

# Page layout

Every page extends `base.html`, which provides the dark sidebar and white top bar. A page fills only its `content` block, plus `head` for page-specific CSS.

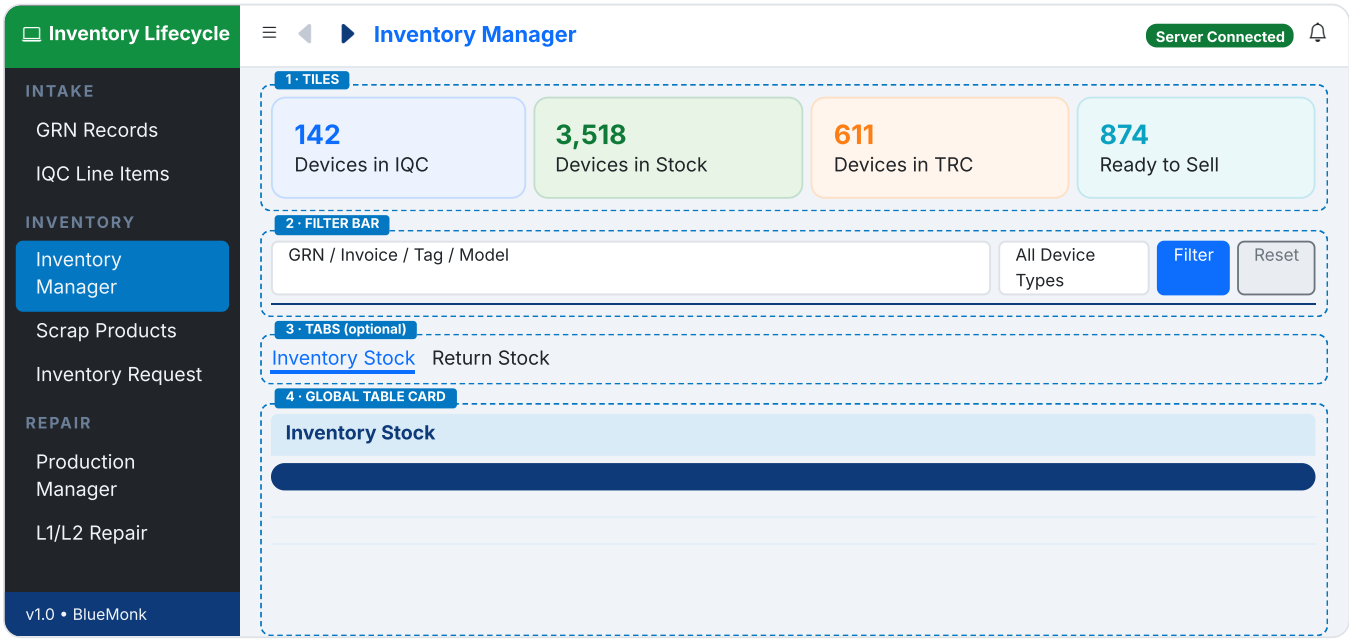

Page anatomy: the standard order of a list page, top to bottom.

## Standard order of a list page

| # | Zone | Rule |
|---|---|---|
| 1 | Summary tiles | Optional. When present, always first, above any tabs. One row. |
| 2 | Filter bar | One line of filters, Filter/Reset on the right, Bluemonk Navy line underneath. |
| 3 | Alert | Only after a redirect with `?success=` or `?error=`. |
| 4 | Tabs | `nav nav-tabs mb-3` when the page has several tables. A table inside a tab hides its own card header. |
| 5 | Table card | Sky Blue card header with icon + title and this table's own actions, then the Global Table. |

## Sidebar and top bar UPDATED

- **Sidebar colours:** brand band OxyPC Forest `#129042` reading "Inventory Lifecycle"; link text `#f0f4f8` (the page background); footer in Bluemonk Navy; active link `#0377c2` ( `--sidebar-active` ). Green icons and badges in the sidebar use the same success green `#0F7A37` as the rest of the app.
- **Back / forward:** filled triangles ( `bi-caret-left-fill` / `-right-fill` ) in Bluemonk Navy `#0e3a7a` , pale grey `#c3cad3` when there is nowhere to go; no pill or background.
- **Sections:** Attendance, Intake, Inventory, Repair, Store Manager, CRM, External Partner, Customer Care, Sales & CRM, Finance, Product Master, Reports, Admin, Notifications, Support.
- **Each link** is wrapped in `has_perm(role,'<module>','enable') and not module_hidden('<module>')` . Its text comes from `sidebar_label()` , so admins can rename it in Sidebar Config.
- **Page title** comes from the `page_title` block and can be overridden in Page Title Config. Breadcrumbs are off by default and switched on per page there.
- **Widths:** layouts must hold at 1366px. Below 768px, the sidebar becomes a slide-in drawer.

05

# Summary tiles UPDATED

Every summary tile in the app is one of five types, drawn by the macros in `templates/_tiles.html`. Types 1 and 2 come in two looks, tint and dark, each with or without a download button. A page picks one look and keeps it for all its tiles.


| # | Type | Macro | Looks |
|---|---|---|---|
| 1 | Single count | `tl.single(count, label, colour, icon)` | Tint or dark · download optional |
| 2 | Multi count | `tl.multi(title, lines, colour, icon)` | Tint or dark · download optional |
| 3 | Single count with secondary counts | `tl.single(…, title=, secondary=[…])` | Tint or dark |
| 4 | Surface count | `tl.surface(label, count, colour)` | One look |
| 5 | Parent count | `tl.parent(title, count, rows, excluded)` | Light or dark |

## 1 · Single count





Tint without and with download, then dark without and with download. Shown together only to compare. Used on Stock Inwards, Hardware, Dealers, CRM lists, TRC Production and the Dashboard stat cards.

## 2 · Multi count

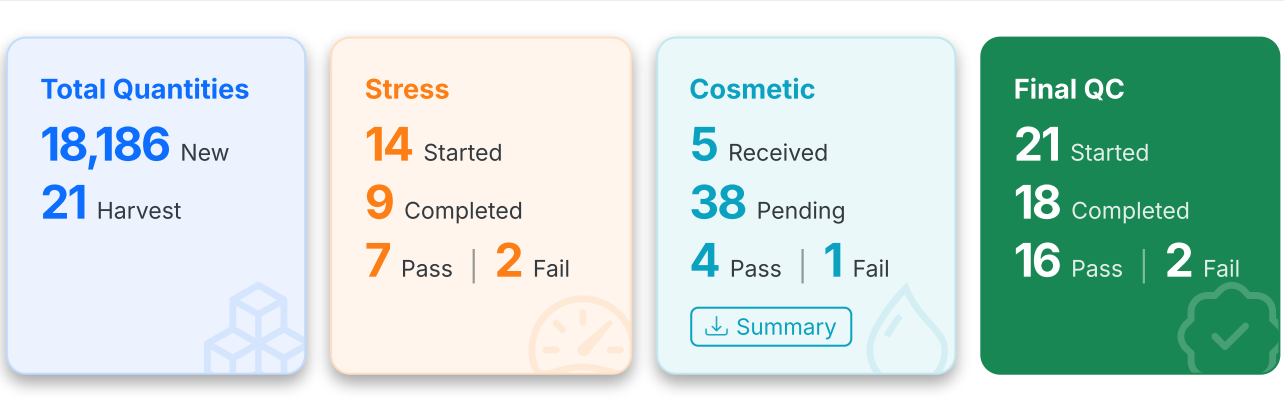



A title in the tile's colour, then several count lines of equal weight, each count with its label beside it. A line can be split into two counts, "16 Pass | 2 Fail". Lines are a list; each line is a list of `(count, label)` parts, or a dict with `parts` and a tooltip `title`. Used for the WorkID Status stage tiles, Parts Manager (New / Harvest) and the Ready for Sale tiles. It replaced the Double count tile.

## 3 · Single count with secondary counts

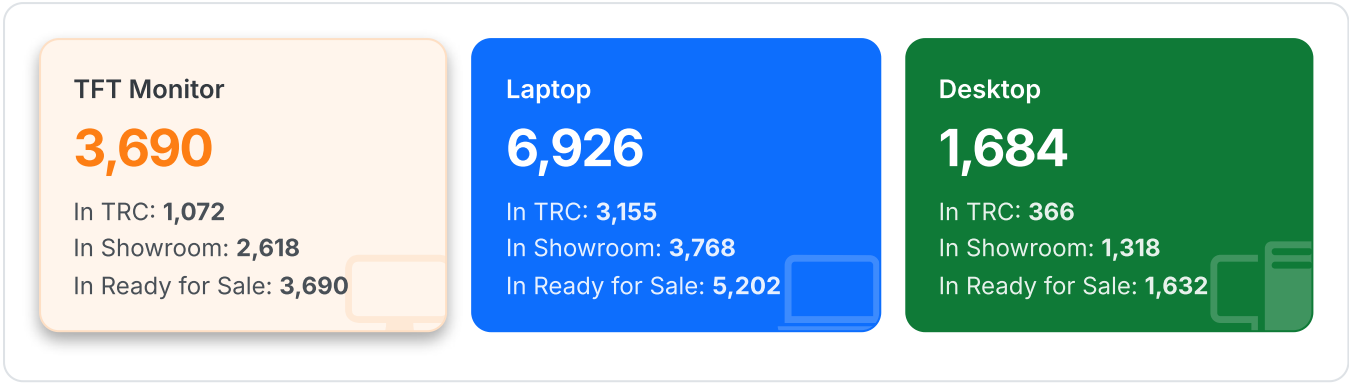



Title, main count, then one line per secondary count. Shown tint first, then dark. Dashboard category cards use the dark look, each linking to All Inventory for that category.

## 4 · Surface count

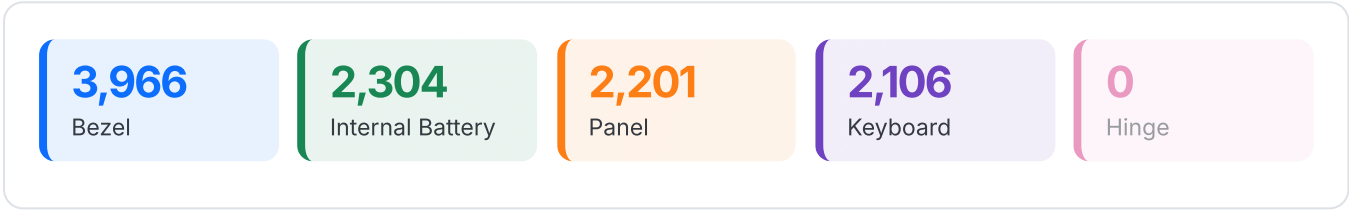


Count with the label under it, as in types 1–3, on a light colour wash with a coloured left edge; no border, no shadow. A zero count fades to 50%. Used for the Dashboard parts counts.

## 5 · Parent count

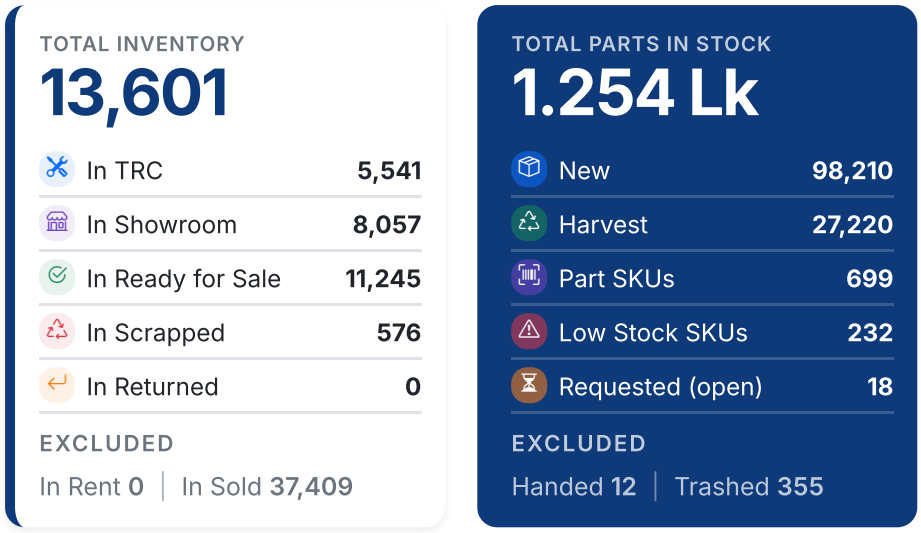


Light (left): a white card with a coloured left edge (default navy `#0e3a7a`). Dark (right, `variant='dark'`): the card filled with that colour, white text. Both have small-caps title, a big total, a breakdown list (icon in a soft square, label, value) and a grey "Excluded" line in plain text with "|" separators (In Rent 0 | In Sold 37,409). It sits at the left of a block of other tiles and stretches to their height. `rows = [(icon, label, value, colour)]`, `excluded = [(label, value)]`. Used for the Dashboard's Total Inventory and Total Parts in Stock.

## Specification

| Part | Spec |
|---|---|
| Colour | One variable, `--tc`, set by the macro from its colour argument. Pick the colour from what the tile counts (section 02, Tile colours). |
| Tint look | Background 8% of the colour over white; 1px border at 25%; coloured count; dark label `#343a40`; shadow. |
| Dark look | Solid colour background and border; white count and title; label at 88% white; no shadow. |
| Box | Radius 10px · padding `1rem 1rem .8rem` · min-height 96px · all tiles in a row stretch to the same height. |
| Text | Count 1.6rem, weight 700, one line, thousands grouped · label .72rem, one line · title .8rem, weight 600 · secondary lines .75rem. |
| Watermark | Optional Bootstrap icon, 3.4rem, bottom-right, partly cut off: 10% of the colour (tint) or 20% white (dark). |
| Download | `download=URL` adds a small outline button at the bottom (`download_label`, default "Download"); it fills on hover. Pass `None` when the user lacks the Export permission. |
| Link | `href=` makes the whole tile a link; it lifts 3px on hover. |
| Row | `<div class="oxt-row">`: a flex row, gap .75rem, tiles share the width (min 150px) and wrap. Surface tiles use `oxt-row oxt-row-surface` (gap .6rem, min 130px). |
| Page hooks | `cls=` extra classes and `extra=` raw attributes (id, data-*) on the tile; `count_attrs=` / `label_attrs=` on the count and label (multi: a third item in each part). |

```
{% import "_tiles.html" as tl %}
<div class="oxt-row">
  {{ tl.single(devices_in_iqc, 'Devices in IQC', '#2F6DB5', 'bi-clipboard-check') }}
  {{ tl.single(pna, 'Total Tags in PNA', '#dc3545', 'bi-exclamation-triangle',
              download=pna_url if can_export else None, download_label='Summary') }}
  {{ tl.multi('Total Quantities', [[(qty_new, 'New')], [(qty_harvest, 'Harvest')]], '#0d6efd', 'bi-
boxes') }}
</div>
<div class="oxt-row oxt-row-surface">{{ tl.surface('Bezel', 3966, '#0d6efd') }}</div>
```

**DO**
Use the macros for every tile, one look per page. One count per label that names it ("Total Tags in L1/L2"). Tiles sit above the filter bar, in one row.

**DON'T**
Hand-write tile markup or add a new tile class, mix tint and dark on one page, or put tiles below the filter bar.

## Dashboard pipeline (unchanged)

The Dashboard's stage pipeline stays its own component: a white card per stage with a coloured title strip and the count below, joined by green arrows, all ten stages on one row. It is not a summary tile and is not drawn by `_tiles.html`.


## Retired tile classes

`lt-tile`, `pm-tile`, `hw-tile`, `prod-tile`, `inv-tile`, `dash-tile`, `part-tile`, `stat-card` and `sum-card` are replaced by the five types above. Don't use them on new or changed pages.

06

# Filter bar

One row of small controls sitting on the page, with no box, and a Bluemonk Navy rule underneath. Every list page uses it.




Rendered with the app's `.filter-bar` CSS.


```
<form method="get" action="/stock" class="filter-bar">
  <div class="filter-bar-row">
    <div class="filter-bar-search"><input class="form-control form-control-sm" title="Search" placeholder="GRN
/ Invoice / Tag / Model"></div>
    <div><select name="device_type" class="form-select form-select-sm" title="Device Type">…</select></div>
    <div><input type="date" name="date_from" class="form-control form-control-sm" title="Date From"></div>
    <div>
      <button class="btn btn-primary btn-sm"><i class="bi bi-funnel me-1"></i>Filter</button>
      <a href="/stock" class="btn btn-outline-secondary btn-sm">Reset</a>
    </div>
  </div>
</form>
```

| Rule | Detail |
|---|---|
| One row | Fields share the width and shrink together (min 70px). The last item, the buttons, sits at the right edge. |
| Search box | `filter-bar-search` takes a double share (min 120px). |
| Checkbox | `filter-bar-check` keeps its natural width so its label never truncates. |
| No labels | Each field has a `title=` tooltip and a placeholder or "All ..." first option. |
| Fields | `-sm` sizes; white background, black text, including multi-select ( `ms-filter` ). |
| Busy pages | More than ~6 filters: `filter-bar filter-bar-6` , a 6-column grid that wraps; buttons share the last column. |

07

# Global Table UPDATED

`initGlobalTable('#id', dtOptions, opts)` wraps a server-side DataTable with the app's shared behaviour and look. It's used on 40+ pages. Never hand-build a list table.

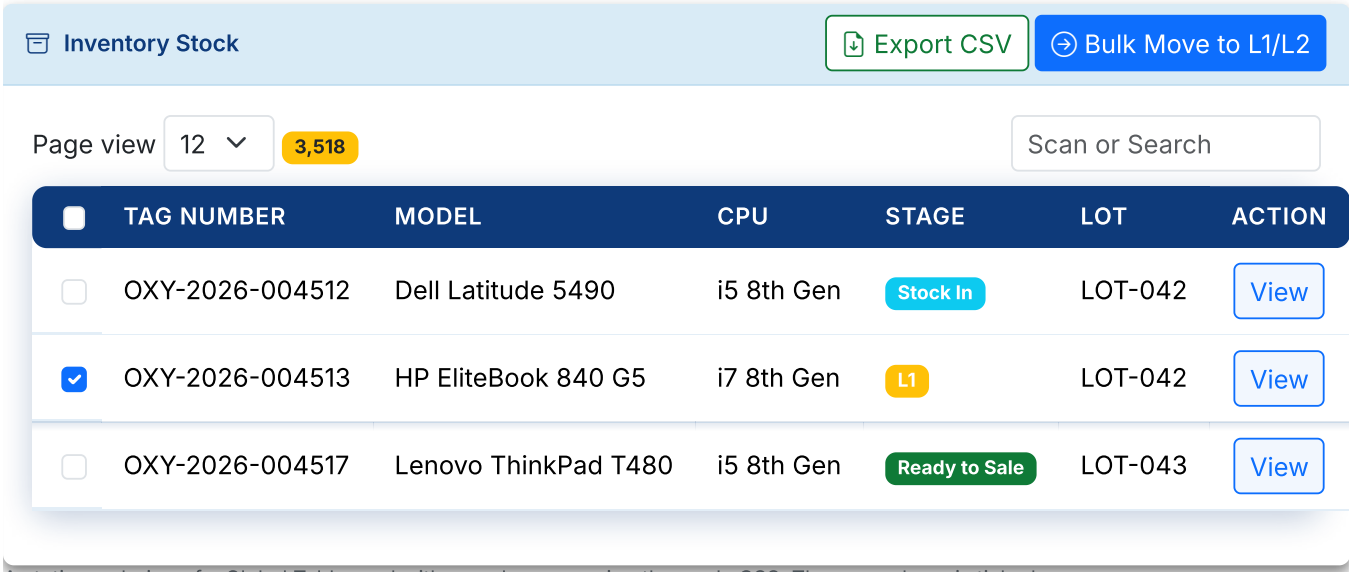


A static rendering of a Global Table card with sample rows, using the app's CSS. The second row is ticked.

## Built-in behaviour

| Behaviour | Default |
|---|---|
| Look NEW | Bluemonk Navy `#0e3a7a` header with white labels and rounded ends; plain white rows with a thin `#e3eef7` divider; soft Bluemonk Navy shadow behind the table. Added automatically ( `.gtable-cards` on the DataTables wrapper); `opts.plainStyle:true` opts out. |
| Selection and hover NEW | Ticked row: pale blue `#eef6fc`, blue left edge, light shadow. Row under the mouse: deeper shadow, always above a ticked row. |
| Header separators NEW | Thin white line (25%) between header labels; 12px left/right padding in header and body cells (first column keeps 16px left) |
| Sorting NEW | Sort arrows sit 12px after the label (soft white; the active direction turns bright white). Every data column sorts, on the server for server-side tables: dates by date, numbers by number, text A–Z, Stage in workflow order, empty values last. Action columns (header "Action"/"Actions" or blank) never sort. Lists, counts worked out per row and button columns stay unsortable. |
| Rows per page | 12 |
| Text | 14px; headers one line, uppercase; columns size around their header |
| Long cells UPDATED | Cells stay on one line (the table scrolls sideways instead of squashing). 32+ characters clamp to 2 lines within 160–260px; full value in a hover tooltip ( `title=` ) |
| Wide tables | Scroll sideways inside the card; first column frozen (first two when column 1 is a checkbox) |
| Toolbar | Left: "Page view" dropdown + yellow row-count badge. Right: search / scan box + pagination |
| First / last column | First has 16px left padding, left-aligned (centred only when a checkbox); last is Actions, centred, never wraps |
| Footer total row | Grey `#e9ecef` (disabled colour), so it reads as a computed summary |
| Empty state | Built-in image and caption. Never hand-write a placeholder `<tr>`, which crashes DataTables |
| Options | `opts.selectAll` header checkbox; `opts.scan` barcode scan-to-select; `opts.freeze:false` to opt out of scrolling |


## Card rules

- **Header:** `card-header bg-transparent d-flex justify-content-between align-items-center`. It turns Sky Blue `#d9ebf6` with a Bluemonk Navy title automatically.
- **Left:** icon + title. **Right:** only this table's own actions or filters. Never a count badge, because the toolbar already shows the count.
- **Header row:** styled by `initGlobalTable` (Bluemonk Navy, rounded); `table-light` for small static tables in forms and detail pages.
- A last column that holds text rather than buttons: add `gtable-last-col-text`.
- After editing `global-table.js`, keep it in `_VERSIONED_ASSETS` (`templates_config.py`) so browsers fetch the new copy.

08

# Buttons and badges

## Button hierarchy

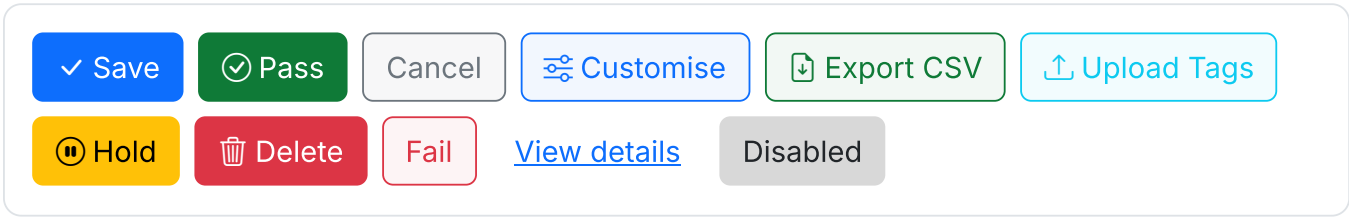


Rendered with the app's CSS, including its outline-button tint, grey disabled style and the v2.2 success green `#0F7A37`.

| Use | Class | Examples |
|---|---|---|
| Main action | `btn btn-primary` | Save, Filter, Create Lot |
| Positive step | `btn btn-success` (#0F7A37, hover #0B6B30) | Pass, Move to Ready, Approve, Sell |
| Secondary / cancel | `btn btn-outline-secondary` | Reset, Cancel, Back |
| Supporting actions | `btn-outline-primary / -success / -info` | Export, Upload, Customise |
| Needs attention | `btn btn-warning` | Hold, Return |
| Destructive | `btn-danger` / `btn-outline-danger` | Delete, Fail, Scrap. Always confirm first |
| Inline link | `btn btn-link` | View details |

- **Size:** `btn-sm` everywhere except the submit button at the bottom of a full form.
- **Labels** are a verb + object ("Move to Final QC"), never wrap, and have an icon with `me-1`. Icon-only buttons need `title=`.
- **Outline buttons** sit on a 5% tint of their colour and fill solid on hover (app-wide).
- **Disabled** is always grey `#D8D8D8` with dark text. Don't restyle it.
- **Destructive** actions confirm with the count: `return confirm('Delete 3 lots?')`.

## Badges UPDATED





| Badge | Rule |
|---|---|
| Stage | `badge bg-{{ device.stage_color }}` + `stage_label`; never chosen by hand |
| Success | `badge bg-success`: solid **#0F7A37** with white text (v2.2) |
| Status | Done/active green · pending yellow with `text-dark` · failed red · inactive grey |
| Notification count | `badge rounded-pill bg-danger` |
| Row count | Yellow toolbar badge from the Global Table; not repeated in the card header |

09

# Forms, modals and feedback

## Forms

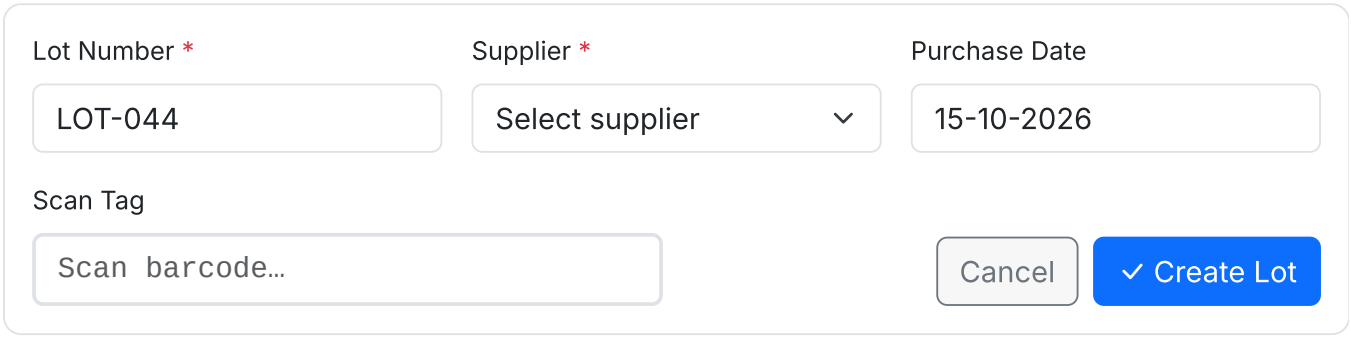



- `form-label` (0.875rem) above each field; required fields marked `<span class="text-danger">*</span>`.
- Fields in a Bootstrap grid ( `row g-3` , `col-md-4` ), grouped in cards by topic. `-sm` sizes inside filter bars, tables and modals.
- Barcode and tag inputs use `barcode-field` (Bluemonk Navy focus ring) and get focus on page load for scanners. The login page is the exception: no field auto-focuses.
- Money shows as ₹ with Indian grouping. Totals are calculated on the server, never in the browser (skill `server-side-financial-snapshot` ).

## Modals

All modals use the same frame: a white `modal-header` with an `h5.modal-title` (icon + title) and a close button, a `modal-body` , and a `modal-footer` with Cancel on the left of the main button.


| Part | Rule |
|---|---|
| Size | Default (500px) for most forms · `modal-sm` for one field or a short confirmation · `modal-lg` for tables and long forms · add `modal-dialog-scrollable` when content can grow, `modal-dialog-centered` for confirmations |
| Header | White. `<h5 class="modal-title">` with a Bootstrap icon and `me-2` , then `btn-close` . The title names the action ("Assign Bucket"), not the page |
| Tinted header | Only to signal the type: `bg-primary bg-opacity-10` informational · `bg-warning bg-opacity-10` caution · `bg-danger bg-opacity-10` + `modal-title text-danger` destructive or defect |
| Body — fields | Context line first ( `small text-muted` , e.g. "3 tag(s) selected"). Labels `form-label small fw-semibold` , required `*` in `text-danger` . Controls `-sm` ; two short fields side by side in `row g-2` |
| Body — no fields | Summary rows: label `text-muted small` + value in `<strong>` , so the user sees exactly what will happen before confirming |
| Errors | An `alert alert-danger small` at the top of the body, hidden ( `d-none` ) until the server returns an error. The modal stays open, the fields keep their values, the button is re-enabled. Mark the bad field `is-invalid` with `invalid-feedback` |
| Footer | Cancel `btn btn-outline-secondary` ( `data-bs-dismiss="modal"` ) left of the main `btn btn-primary` with icon. A secondary destructive action sits far left with `me-auto` . Informational modals have one OK/Close button |
| Behaviour | Disable the main button while saving. On success, close the modal and refresh the table ( `ajax-partial-refresh` ) or redirect with `?success=` |

## Alerts and feedback

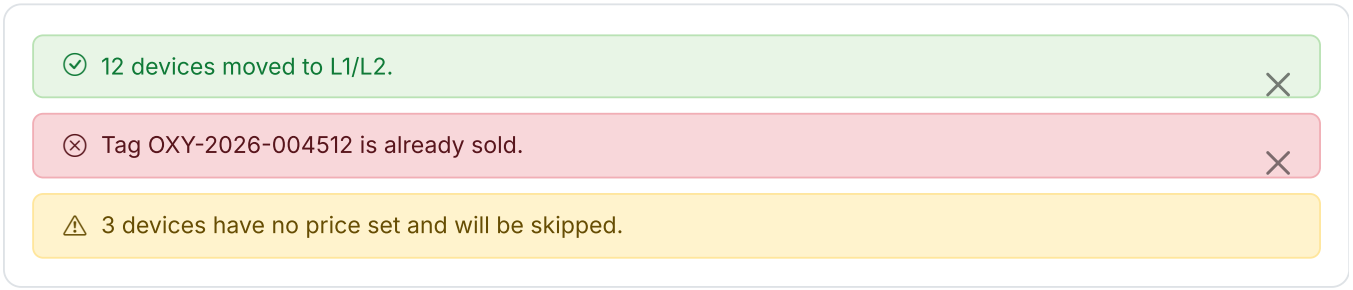


- After a form submit, redirect with `?success=` or `?error=`; the page shows a dismissible alert above its content.
- `alert-warning` for what the user must know before acting; `alert-info` for neutral guidance. One sentence, with the number.
- No alert for "no data": the Global Table's empty state covers it.
- **Close button.** Page alerts use `py-2`; add `.alert-dismissible.py-2 .btn-close { padding: .75rem 1rem; }` to `app.css` to centre the ×.

### Upload result banner

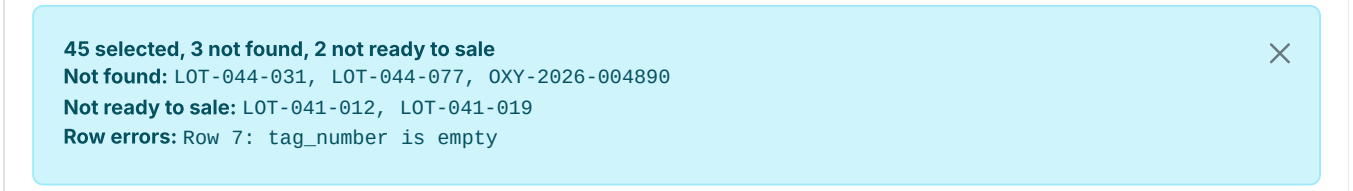


- Shown after **Bulk Upload Tags** on Ready to Sale (and other pages that tick rows from a CSV). The modal closes, the banner is added at the top of `<main>` and the page scrolls to it.
- `alert alert-info alert-dismissible small mb-3`. Bold summary line with every count, then one line per problem group with the tags in `font-monospace`.
- The one place an alert runs past one sentence: the user needs the exact tags to fix the file. It never auto-hides.

## Upload results and errors

Bulk Lot, Device (IQC) and Spare Parts uploads save valid rows, skip and list bad ones, and review duplicates.

| Part | Rule |
|---|---|
| Count alerts | Two side by side ( `col-md-6` ), not dismissible: rows inserted in `alert-success` ; rows with errors in `alert-warning` if any, else `alert-success` . |
| Error table | `table table-sm table-bordered small` , `table-warning` header, columns # and Error. Each message starts `Row N:` and names the field and bad value. |
| Actions | Back to List ( `btn-primary` ), Upload Another File ( `btn-outline-secondary` ). |
| Duplicate review | Opens by itself for repeated Tag Numbers or unknown lots. `modal-xl` , static backdrop; Update All and Skip and Submit left of the close button. Row actions are small outline buttons: Approve Move (primary), Update (warning), Add Lot (success). |

10

# Patterns

## Showing and hiding by permission

A control the user can't use is hidden, not disabled. A control they can use must always render, including for custom roles that admins create (for example `trc_manager`).

| Need | Use |
|---|---|
| Module, sidebar link, section | `has_perm(role,'<module>','enable')` + `not module_hidden('<module>')`; `any_perm()` for a section header |
| Role-specific button | `role_allowed(current_user.role, 'admin', 'sales_manager')`. It mirrors the server's `require_roles()` and lets custom roles through |
| Server side | Always re-checked with `require_roles` and `verify_csrf`. Hiding is for clarity, not security |

```
{% if role_allowed(current_user.role,
      'admin', 'sales_manager') %}
  <button class="btn btn-success btn-sm">
    Approve</button>
{% endif %}
```

**DON'T**

`current_user.role.value in ['admin','sales_manager']`. Custom roles silently lose the button while the server would allow them.

## Updating part of a page

When an action should refresh only a table or the tiles (for example a bulk assign in a modal):

1. The POST endpoint returns JSON when the request has `X-Requested-With: XMLHttpRequest`, and still redirects otherwise.
2. The page submits with `fetch()` + `FormData`, closes the modal, then calls `dt.ajax.reload(null, false)` (keeps the current page) or swaps the region by ID with `DOMParser`.
3. Re-attach event handlers in swapped HTML and refresh tile counts.
4. Without `fetch`, the normal form submit still works.

## Page titles and breadcrumbs

- Admins rename any page in **Admin → Page Title Config**; the top bar shows the custom title, otherwise the template's `page_title`.
- Breadcrumbs are **off by default** (since 15 Oct 2026) and switched on per page in the same screen.

11

# Checklist and change process

## Design checklist for a new or changed page

| ✓ | Check |
|---|---|
| ☐ | Extends `base.html`; sets `title` and `page_title`; sidebar link gated by `has_perm` with a `sidebar_label` |
| ☐ | Order: tiles → filter bar → alert → tabs → table card |
| ☐ | Tiles use the light-tint spec, with colours from the tile palette |
| ☐ | Filters use `filter-bar`: one row, `-sm` controls, `title=` instead of labels, Filter/Reset on the right |
| ☐ | Table uses `initGlobalTable` in a card with icon + title; actions in the last column |
| ☐ | Buttons follow the hierarchy; destructive ones confirm with a count |
| ☐ | Stage badges use `stage_color`; no unknown `bg-*` classes |
| ☐ | Greens use the OxyPC tokens (success `#0F7A37`), never Bootstrap's old #198754 |
| ☐ | Role checks use `role_allowed()` / `has_perm()`, never a hard-coded list |
| ☐ | Works at 1366px; wide tables scroll inside the card |
| ☐ | No CDN links; any new library goes in `static/vendor/` |

## From change to production

| # | Step | What happens |
|---|---|---|
| 1 | Database approval | A new table or column is drafted as `.dbml` and approved in dbdiagram.io before it is built. |
| 2 | Build and verify | Templates must parse. Run skill `verify-feature`; run `regression-sweep` if `base.html`, `app.css`, a macro or a Jinja global changed. |
| 3 | Staging | Changes go to the `staging` branch. Staging machines (Windows `RUN_STAGING.bat`, Mac `START_STAGING.command`) load it at `http://localhost:8001`; check with Ctrl+F5. |
| 4 | Approval | Pushed only after an explicit "push" for that batch. An earlier yes never carries over (`commit-deploy-gate`). |
| 5 | Production | Merge to GitHub `main` (`Bluemonk123/oxypc-inventory`). Production at `http://10.199.206.109` updates within 2–5 minutes. |
| 6 | Keep this document current | Edit `qa_docs/design_system/design_system.html` in the same change and rebuild the PDF. |

APPENDIX A

# Token and file reference

## CSS variables ( `app.css :root` ) UPDATED

| Variable | Value | Purpose |
|---|---|---|
| `--sidebar-width` | 240px | Sidebar width |
| `--sidebar-text` | #f0f4f8 | Sidebar link text (same as page background) |
| `--sidebar-active` | #0377c2 | Active sidebar link |
| `--brand-blue` | #0e3a7a | History buttons, focus, brand (was #0377c2) |
| `--oxy-leaf` / `--oxy-forest` | #54BA48 / #129042 | OxyPC greens: accents / profit |
| `--oxy-text` / `--bs-success` | #0F7A37 | Success: buttons, badges, green text, tiles |
| `--oxy-mint` | #E8F5E6 | Green tile / stat-card background |
| `--topbar-height` | 56px | Top bar height |
| `--app-zoom` | 0.9 | Global UI scale |
| `--full-vh` | calc(100vh / var(--app-zoom)) | Use instead of 100vh |

## Shared classes

| Class | What it does |
|---|---|
| `filter-bar` , `filter-bar-row` , `filter-bar-search` , `filter-bar-check` , `filter-bar-6` | Filter bar layout |
| `gtable` , `gtable-card` , `gtable-top` , `gtable-cards` | Global Table (added by `initGlobalTable` ); `gtable-cards` = Bluemonk Navy header, row shadows |
| `gtable-last-col-text` | Last column is text: left-aligned and wraps |
| `gtable-clamp2` | Two-line clamp with tooltip, 160–260px wide |
| `bg-teal` , `bg-purple` , `bg-pink` | Custom badge colours |
| `barcode-field` | Monospace scan input with Bluemonk Navy focus ring |
| `card-hover` | Lift-on-hover for clickable KPI cards |
| `profit-positive` / `-negative` / `-zero` | P&L colours (#129042 / #d63031 / #888) |
| `prod-tile*` , `inv-tile*` , `pm-tile*` | Page-level tile classes (light-tint, light-tint, solid) |

## Jinja globals for UI

| Global | Use |
|---|---|
| `has_perm(role, module, action)` | Module permission check |
| `any_perm(role, *modules)` | Show a section if any module is allowed |
| `role_allowed(role, *roles)` | Role check that is safe for custom roles |
| `module_hidden(key)` | Master Data global visibility |
| `sidebar_label(key, default)` | Admin-renamable sidebar text |
| `resolve_page_title(path)` , `breadcrumb_enabled(path)` | Page Title Config |
| `app_version()` | Version shown on the login page and sidebar footer |

## Where things live

| Path | Contents |
|---|---|
| `templates/base.html` | Sidebar, top bar, alerts, breadcrumbs, script includes |
| `static/css/app.css` | All shared overrides, colour tokens |

| | |
|---|---|
| `static/js/global-table.js` | `initGlobalTable` |
| `static/img/` logo files | Box logo, Dark and Light versions and favicon (browser tab, login page, sidebar header) |
| `static/vendor/` | Bootstrap 5, Bootstrap Icons, DataTables, Chart.js (local copies) |
| `templates_config.py` | Jinja globals, asset versioning |
| `models/device.py` | `STAGE_COLORS` |
| `qa_docs/design_system/` | This document's source ( `design_system.html` ) and PDF builder |
| `.claude/skills/` | Project workflows: verify-feature, regression-sweep, commit-deploy-gate, custom-role-permissions, ajax-partial-refresh |