OXYPC COMPUTERS

OxyPC Inventory Lifecycle Design System

Colours, type, layout and components that every page of the app is built from, with the rules for using them.

v2.7

Version	2.7 — 9 November 2026
Applies to	OxyPC Inventory Lifecycle web app (FastAPI + Jinja2 + Bootstrap 5)
Based on	Code on branch `staging`, `static/css/app.css`, `static/js/global-table.js`
Environments	Production `http://10.199.206.109` · Staging `http://localhost:8001`
Audience	Developers, reviewers and Claude sessions building or changing pages
What's new	v2.7: chapter 12 Menus (mega menu for the top-bar +, simple menu) and pill tabs (07, Global Tabs). v2.6: global filters, Global Card / Table / Tabs, card-header and Add buttons. v2.5: five tile types. v2.4: new logo, spacing.

CONTENTS

What's inside

01	Introduction and principles	Why the system exists, five rules
02	Colour	Brand, semantic, tile and stage colours
03	Typography, spacing and icons	Type, spacing and gutters, icons, logo
04	Page layout	Sidebar, top bar, page anatomy
05	Summary tiles	Five tile types, Lakh / Crore counts
06	Filters	Filter bar, field types, card headers
07	Global Card, Table and Tabs	Containers, settings, placements
08	Buttons and badges	Hierarchy, card-header and Add buttons
09	Forms, modals and feedback	Inputs, dialogs, alerts
10	Patterns	Permissions, partial refresh, breadcrumbs
11	Checklist and change process	From idea to production
12	Menus	Mega menu (+), simple menu, profile menu
A	Token and file reference	CSS variables, class names, locations

01

Introduction and principles

Every OxyPC Inventory Lifecycle page is assembled from the same few parts: summary tiles, a filter bar and a Global Table inside a card. This document records how each part looks and how it is built, so that new pages match the 238 templates already live.

The system sits on Bootstrap 5 with a thin shared layer in `static/css/app.css`. Table behaviour lives in `static/js/global-table.js`. All libraries are served locally from `static/vendor/`, with no CDN, so the app works on the office LAN without internet.

Five principles

Principle	What it means in practice
Reuse, don't restyle	Use the shared classes (`filter-bar` , `initGlobalTable` , the tile pattern). A fix in `app.css` then reaches every page at once.
Dense but readable	Tables use 14px text, one-line headers and two-line cell clamps, so 12+ rows fit on a 1366px office screen without wrapping.
Colour carries meaning	Each colour stands for a stage or state and is used the same way on tiles, badges and buttons. Colour is never decoration.
One row of controls	Filters and their buttons sit on one line above the table. Row actions sit in the last column, centred.
Permissions decide what shows	A control appears only for roles that may use it, checked with `has_perm()` or `role_allowed()` . Never a hard-coded role list.

How to use this document

- **Building a new page:** read chapters 04–09, then work through the checklist in chapter 11.
- **Changing an existing page:** find the component's chapter. The samples are rendered with the app's real CSS.
- **Reviewing on staging:** compare the page against the specs and the "Do / Don't" boxes.

> **SOURCE OF TRUTH**
> When this document and the code disagree, the code in production wins. Update this document in the same change — its source is `qa_docs/design_system/design_system.html` ; rebuild the PDF with `build_pdf.py` next to it.

02

Colour

Four groups of colour: the brand colours and neutrals around every page (including the OxyPC greens), Bootstrap's semantic colours for actions and states, tile colours for summary counts, and fixed stage colours for device badges.

Brand and neutrals UPDATED

Bluemonk Navy
`#0e3a7a` --brand-blue
History buttons, table headers, focus rings, sidebar footer, card titles.

Bluemonk Blue
`#0377c2` --sidebar-active
Active sidebar link only

Sky Blue
`#d9ebf6` —
Global Table card header

OxyPC Leaf
`#54BA48` --oxy-leaf
Accents only (logo, icon top) — too light for text

OxyPC Forest
`#129042` --oxy-forest
Profit figures (`.profit-positive`), icon front

Mint
`#E8F5E6` --oxy-mint
Green tile and stat-card background

Light Colour
`#f0f4f8` --sidebar-text
Sidebar link text, and the page background behind all content

Dark Colour
`#212529` body text
Body text, table cells, form fields

Disabled
`#D8D8D8` —
Every disabled button

Semantic colours

Bootstrap 5 defaults, except Success (OxyPC green), plus three custom badge colours defined in `app.css` (teal, purple, pink).

Primary
`#0d6efd` primary
Main actions, QC Check, Active

Success UPDATED
`#0F7A37` success
Save, Ready to Sell, done.

Warning
`#ffc107` warning
GRN, L1/L2, Returned, pending

Danger
`#dc3545` danger
L3, Scrapped, PNA, delete

Info
`#0dcaf0` info
Stock In, TRC Production

Secondary
`#6c757d` secondary
IQC, Inactive, neutral

Dark
`#212529` dark
Sold, Scrap for Sale

Teal
`#0d9488` bg-teal
All cosmetic stages

Purple
`#6f42c1` bg-purple
Final QC, "at you" counts

Pink
`#d63384` bg-pink
Cosmetic summaries

Tile colours UPDATED

Summary tiles set one variable, `--tc`, and derive their tint, border, number and watermark from it. These are the shades in use. They are darker than Bootstrap's warning and info, which are too pale for coloured text on a light tint. Green tiles sit on mint `#E8F5E6`.

Blue
`#0d6efd`
IQC, L1/L2, Active

Green
`#0F7A37`
Stock, Final QC, Done

Orange
`#fd7e14`
TRC, L3/L4

Amber
`#f0ad00`
Price pending (solid tiles)

Teal
`#0aa2c0`
Ready to Sell, parts

Mint
`#20c997`
Stress

Red
`#dc3545`
PNA, failures

Pink
`#e83e8c`
Cosmetic

Purple
`#6f42c1`
At you

Grey
`#6c757d`
Returned, Inactive

Device stage colours

Fixed in `STAGE_COLORS` (`models/device.py`) and read through `device.stage_color`. Never choose a stage colour by hand.

GRN · IQC · Stock In · L1 · L2 · L3 · TRC Production · QC Check · Cosmetic Received · Cleaning · Painting · Cosmetic Completed · Final QC · Final QC Pass Hold · Final QC Fail Hold · Ready to Sale · Sold · Returned · Scrapped · Scrap for Sale

Rendered with the app's badge classes. All cosmetic sub-stages (Putty, Dry Sanding, Masking, Water Sanding) are teal. Success-green stages show the v2.2 solid `#0F7A37` badge.

Money and profit UPDATED

Class	Colour	Use
`.profit-positive`	#129042 ₹12,450	Profit, positive P&L (was #0f9e4e)
`.profit-negative`	#d63031 −₹3,200	Loss
`.profit-zero`	#888 ₹0	Break-even

DO
Pick a tile or badge colour from what it counts: green for stock and done, orange for repair, red for failures.

DON'T
Use a `bg-*` class that isn't in Bootstrap or `app.css`. The badge renders white text on no background.

03

Typography, spacing and icons

The app uses Segoe UI (Windows), falling back to Arial. The whole interface renders at 90% zoom, so the sizes below are what the CSS says, before that zoom.

Type scale

Role	Spec	Sample
Page title (top bar)	1.25rem · bold · primary blue	Inventory Manager
Tile number	1.6rem · 700 · tile colour	3,518
Card title	1rem · semibold · navy	Inventory Stock
Body / table text	14px · 400	LOT-042 · Dell Latitude 5490 · i5 8th Gen
Table header	0.8rem · 600 · uppercase · 0.5px tracking	TAG NUMBER
Form label / sidebar link	0.875rem	Device Type
Tile label	0.72rem · #343a40	Devices in Stock
Sidebar section	0.7rem · 700 · uppercase · 1px tracking	INVENTORY
Barcode field	Courier New · 1rem	OXY-2026-004512


Corners, shadow and frame sizes

Token	Value	Where
Card and tile radius	10px	Cards, summary tiles, `.stat-card`
Table radius	0.5em	Tables inside cards (clip-path on scroll tables)
Control radius	6px	Inputs, DataTables search and length controls, sidebar links
Shadow	`0 .25rem .5rem rgba(0,0,0,.5)`	`.shadow-sm` is overridden app-wide to this. Use the class, don't write your own
Sidebar / top bar	240px / 56px	`--sidebar-width`, `--topbar-height`
App zoom	0.9	`--app-zoom`. Use `var(--full-vh)` instead of `100vh`

Spacing, gutters and padding NEW

All spacing comes from Bootstrap's spacer scale on a 16 px base; never type pixel margins. The app renders at 90% zoom, so a 16 px gap is 14.4 px on screen.

Step	Value	CSS px	On screen	Typical use
`1`	.25rem	4	3.6	Icon to text inside badges, tight button groups (`gap-1`)
`2`	.5rem	8	7.2	Between buttons and filters (`gap-2`), form-field gutter (`g-2`), compact card and modal padding (`py-2`)
`3`	1rem	16	14.4	Tile and card gutter (`g-3`), card body padding, card stack (`mb-3`)
`4`	1.5rem	24	21.6	Page side padding (`px-4`), tiles → filter bar (`mb-4`), dashboard gutter (`g-4`)
`5`	3rem	48	43.2	Empty states and login only

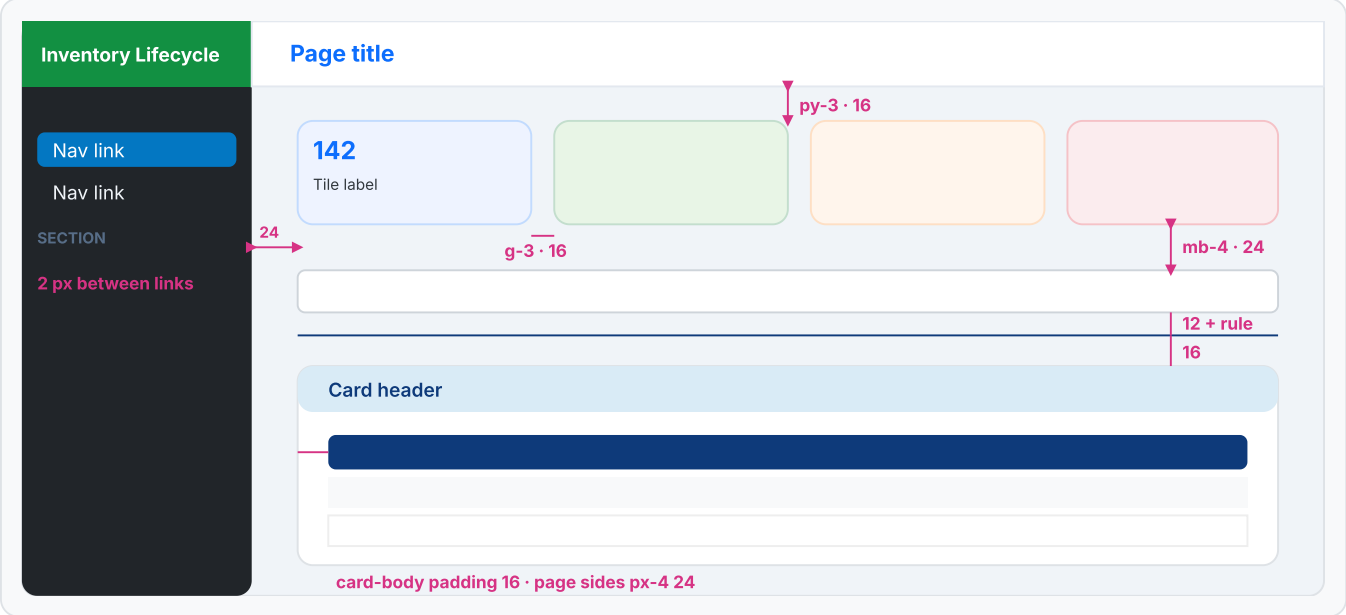

Page anatomy with the real gaps, in CSS px. Pink labels name the class and its size.

Page frame	
Main content	`px-4 py-3` = 24 / 16
Flash messages	`px-4 pt-2` = 24 / 8
Top bar	56 high, `px-3` = 16 sides
Sidebar	240 wide; list `px-2` = 8 sides, 16 top and bottom
Sidebar header	`px-3 py-3` , min 56 high
Sidebar link	7.2 × 12 padding, radius 6, 2 apart
Section label	12 top, 12 sides, 4 bottom

Gutters (grid and flex)	
Tiles, cards	`row g-3` = 16 (189 uses)
Form fields	`row g-2` = 8 (130 uses)
Dashboard sections	`row g-4` = 24
Buttons, filters	`gap-2` = 8 (333 uses)
Row actions	`gap-1` = 4
Tile rows (flex)	`gap-3` = 16
Filter bar fields	`gap: .5rem` = 8

Component padding NEW

Inside each shared component the padding is fixed. Values in CSS px, before the 90% zoom.

Component	Padding	Vertical spacing
Summary tile	`.6rem .7rem` = 9.6 × 11.2; row padding 4 6 10 (keeps the shadow)	Label 5.6 below number, button 9.6 below label; row `mb-4`
Filter bar	12 bottom, then a 1 px Bluemonk Navy rule	`mb` 16 to the card below
Card header	`.5em 1em` = 8 × 16	—
Card body	16 (forced on any card holding a table); compact `py-2` = 8; full-bleed tables `p-0`	Cards stack `mb-3` = 16, or `mb-4` = 24 between sections
Global Table cell	8 all round; first column 16 left; 12 left/right in the card style	Table 6 below its toolbar, 14 below the table
Modal	Header and footer 16 (compact `py-2` = 8); body 16	Fields `mb-3` = 16; two short fields side by side in `row g-2`
Alert	`py-2` = 8 high, 16 sides	Above the page content, `mb-3`
Buttons	`btn-sm` = 4 × 8; tile button `py-0 px-1`	Icon `me-1` = 4 before the text
Empty state	24 × 16, items 8 apart	—

DO
Use Bootstrap spacing classes (`p-*` , `m-*` , `g-*` , `gap-*`) with the steps above. Same component, same spacing on every page.

DON'T
Write inline `style="margin:…px"` , mix `g-2` and `g-3` in one tile row, or remove the tile row padding (the shadow gets clipped).

Icons

Bootstrap Icons only, as `<i class="bi bi-…">`. Use `me-1` before button text and `me-2` before sidebar and card titles. Reuse the icon a module already has in the sidebar.

Stock Inwards `bi-archive`	Production `bi-cpu`	IQC `bi-clipboard-check`	In stock `bi-box-seam`
Repair / TRC `bi-tools`	Ready to sell `bi-bag-check`	Filter `bi-funnel`	Download `bi-file-earmark-arrow-down`
Upload `bi-upload`	Edit `bi-pencil`	Delete / scrap `bi-trash3`	Done `bi-check-circle`
Warning / PNA `bi-exclamation-triangle`	Scan `bi-upc-scan`	Assigned to you `bi-person-workspace`	Transfer `bi-arrow-left-right`

APP ICON
The OxyPC logo, its meaning, sizes and rules are on the next page (Logo design and usage).

Logo design and usage NEW LOGO


The OxyPC Inventory Lifecycle logo is a stock box with rounded corners, drawn in the three OxyPC greens. It carries the whole device journey in one shape: a tick lying on the lid for QC passed and ready to sell, a laptop on the front for the refurbished device, and a van on the side for intake and dispatch. The logo has no tile: the box stands on its own.



Part	Colour	Stands for
Lid, with tick	`#54BA48` OxyPC Leaf	QC passed, ready to sell. The tick lies flat on the lid, with a thin deep-green edge under it
Front face, with laptop	`#129042` OxyPC Forest	The refurbished device itself
Side face, with van	`#0B6B30` Deep green	Intake and dispatch: devices arriving and leaving
Symbols	`#FFFFFF`	Line icons, 2.2–2.6 strokes on a 64 grid, round caps
Corners	Radius 4.5 of 64	All six outer corners of the box are rounded

Drawn on a 64 × 64 grid. The box is isometric (faces at 30°) and sits inside 12–52 horizontally and 9–55 vertically. Light from the top: lid lightest, side darkest. The laptop and van are drawn at 85% so they sit inside their faces with room around them.

Versions and where they are used





File	What it is	Used in
`oxypc-box-dark.svg`	Dark version: green box, white symbols	Default logo: documents, emailers, login page, white and light pages, Navy and Dark backgrounds
`oxypc-box-dark-favicon.svg`, `.ico`	Dark version, favicon build: thicker lines, bigger tick, no motion lines	Browser tab (16–32 px)
`oxypc-box-light.svg`	Light version: white box, OxyPC Forest symbols	Sidebar header on OxyPC Forest `#129042`, and other green or dark surfaces
`static/partner/icon-192/512.png`	Partner portal app icons (separate artwork)	Installed partner app on phones

Rule	Spec
Minimum size	16 px. At 32 px and below, use the favicon build
Clear space	Keep at least 1/8 of the logo's width empty on every side (12 px around a 96 px logo)
Background	Dark version on white, Light `#f0f4f8`, Mint, Bluemonk Navy and Dark. Light version on OxyPC Forest, Navy and Dark; never on white or Light, where the white box disappears
Colour	Always the three greens and white (Dark version) or white and Forest (Light version). One-colour use (print, stamps): solid OxyPC Forest `#129042` or solid white
Next to the name	Logo height = 1.5× the cap height of "OxyPC Inventory Lifecycle"; gap between them = 1/4 of the logo width


DO
Use the SVG files as they are, scaled evenly. Use the Dark version whenever you are unsure of the background.

DON'T
Recolour, stretch, rotate, outline or add effects; put the logo on a tile; stand the tick upright; use the old sharp-cornered box; redraw the logo in CSS or as an icon font.

04

Page layout

Every page extends `base.html`, which provides the dark sidebar and white top bar. A page fills only its `content` block, plus `head` for page-specific CSS.

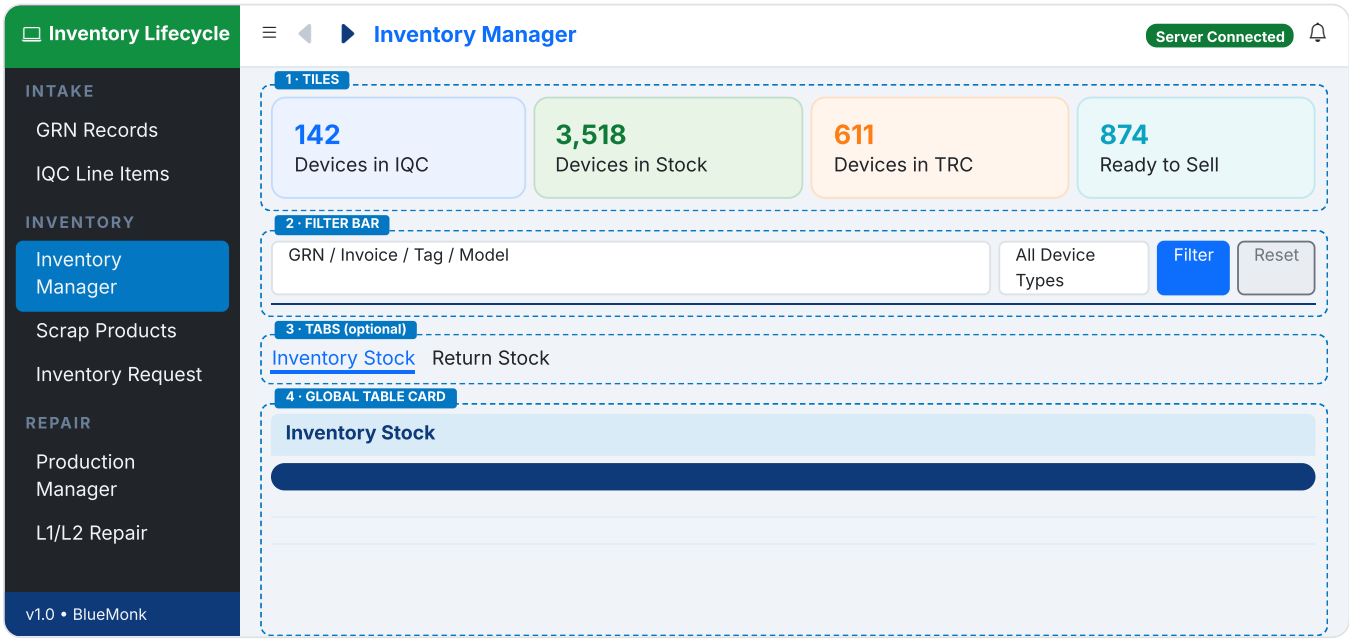

Page anatomy: the standard order of a list page, top to bottom.

Standard order of a list page

#	Zone	Rule
1	Summary tiles	Optional. When present, always first, above any tabs. One row.
2	Filter bar	One line of filters, Filter/Reset on the right, Bluemonk Navy line underneath.
3	Alert	Only after a redirect with `?success=` or `?error=`.
4	Tabs	`nav nav-tabs mb-3` when the page has several tables. A table inside a tab hides its own card header.
5	Table card	Sky Blue card header with icon + title and this table's own actions, then the Global Table.

Sidebar and top bar UPDATED

- **Sidebar colours:** brand band OxyPC Forest `#129042` reading "Inventory Lifecycle"; link text `#f0f4f8` (the page background); footer in Bluemonk Navy; active link `#0377c2` (`--sidebar-active`). Green icons and badges in the sidebar use the same success green `#0F7A37` as the rest of the app.
- **Back / forward:** filled triangles (`bi-caret-left-fill` / `-right-fill`) in Bluemonk Navy `#0e3a7a` , pale grey `#c3cad3` when there is nowhere to go; no pill or background.
- **Sections:** Attendance, Intake, Inventory, Repair, Store Manager, CRM, External Partner, Customer Care, Sales & CRM, Finance, Product Master, Reports, Admin, Notifications, Support.
- **Each link** is wrapped in `has_perm(role,'<module>','enable') and not module_hidden('<module>')` . Its text comes from `sidebar_label()` , so admins can rename it in Sidebar Config.
- **Page title** comes from the `page_title` block and can be overridden in Page Title Config. Breadcrumbs are off by default and switched on per page there.
- **Widths:** layouts must hold at 1366px. Below 768px, the sidebar becomes a slide-in drawer.


05

Summary tiles UPDATED

Every summary tile in the app is one of five types, drawn by the macros in `templates/_tiles.html`. Types 1 and 2 come in two looks, tint and dark, each with or without a download button. A page picks one look and keeps it for all its tiles.


#	Type	Macro	Looks
1	Single count	`tl.single(count, label, colour, icon)`	Tint or dark · download optional
2	Multi count	`tl.multi(title, lines, colour, icon)`	Tint or dark · download optional
3	Single count with secondary counts	`tl.single(…, title=, secondary=[…])`	Tint or dark
4	Surface count	`tl.surface(label, count, colour)`	One look
5	Parent count	`tl.parent(title, count, rows, excluded)`	Light or dark

1 · Single count

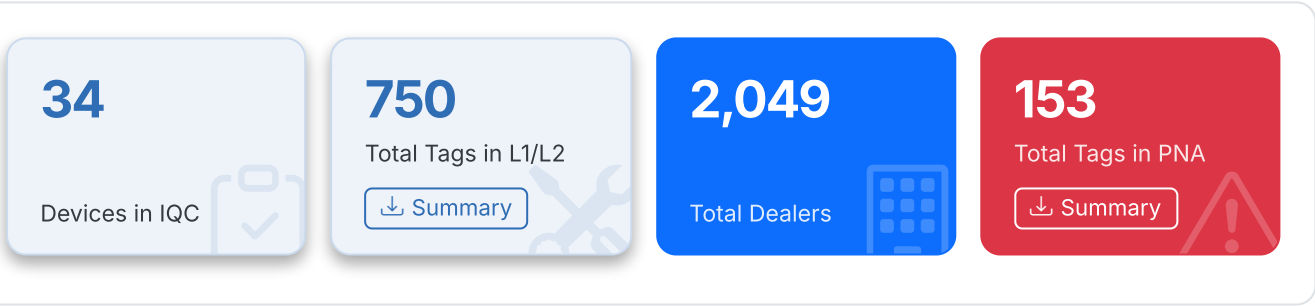


Tint without and with download, then dark without and with download. Shown together only to compare. Used on Stock Inwards, Hardware, Dealers, CRM lists, TRC Production and the Dashboard stat cards.

2 · Multi count

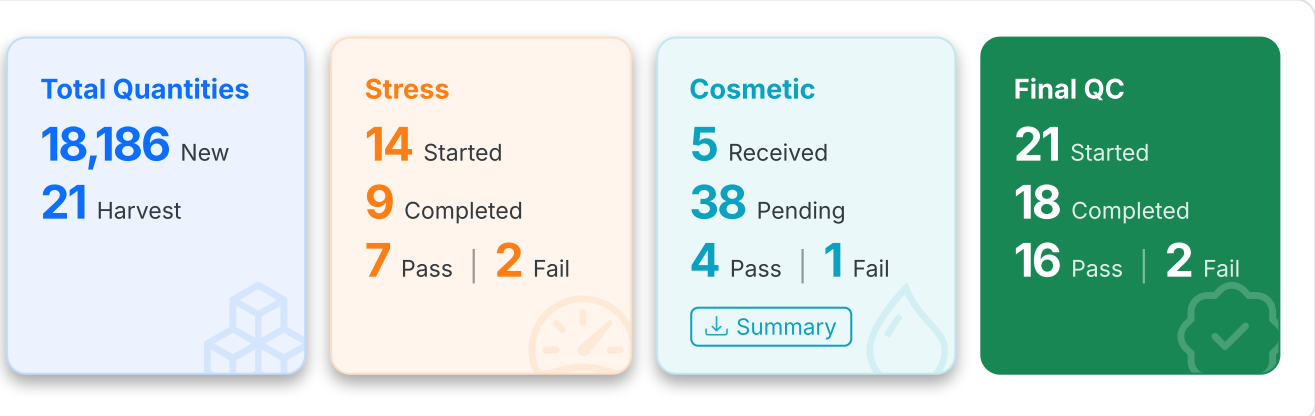


A title in the tile's colour, then several count lines of equal weight, each count with its label beside it. A line can be split into two counts, "16 Pass | 2 Fail". Lines are a list; each line is a list of `(count, label)` parts, or a dict with `parts` and a tooltip `title`. Used for the WorkID Status stage tiles, Parts Manager (New / Harvest) and the Ready for Sale tiles. It replaced the Double count tile.

3 · Single count with secondary counts

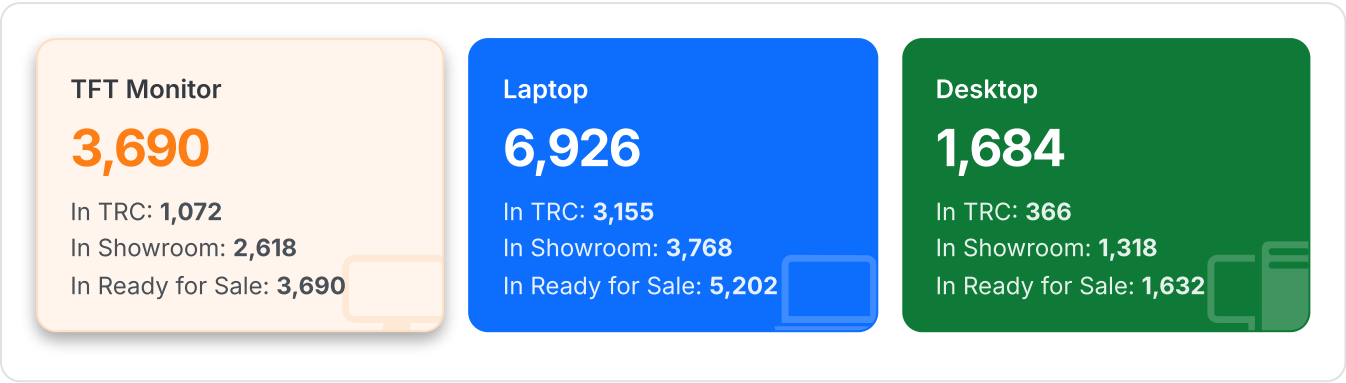


Title, main count, then one line per secondary count. Shown tint first, then dark. Dashboard category cards use the dark look, each linking to All Inventory for that category.

4 · Surface count

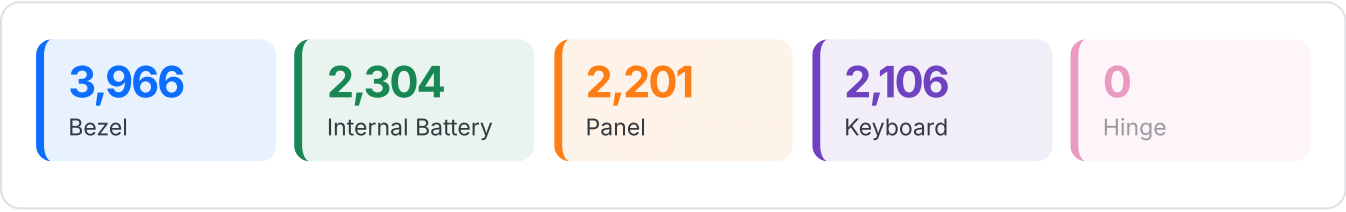

Count with the label under it, as in types 1–3, on a light colour wash with a coloured left edge; no border, no shadow. A zero count fades to 50%. Used for the Dashboard parts counts.

5 · Parent count

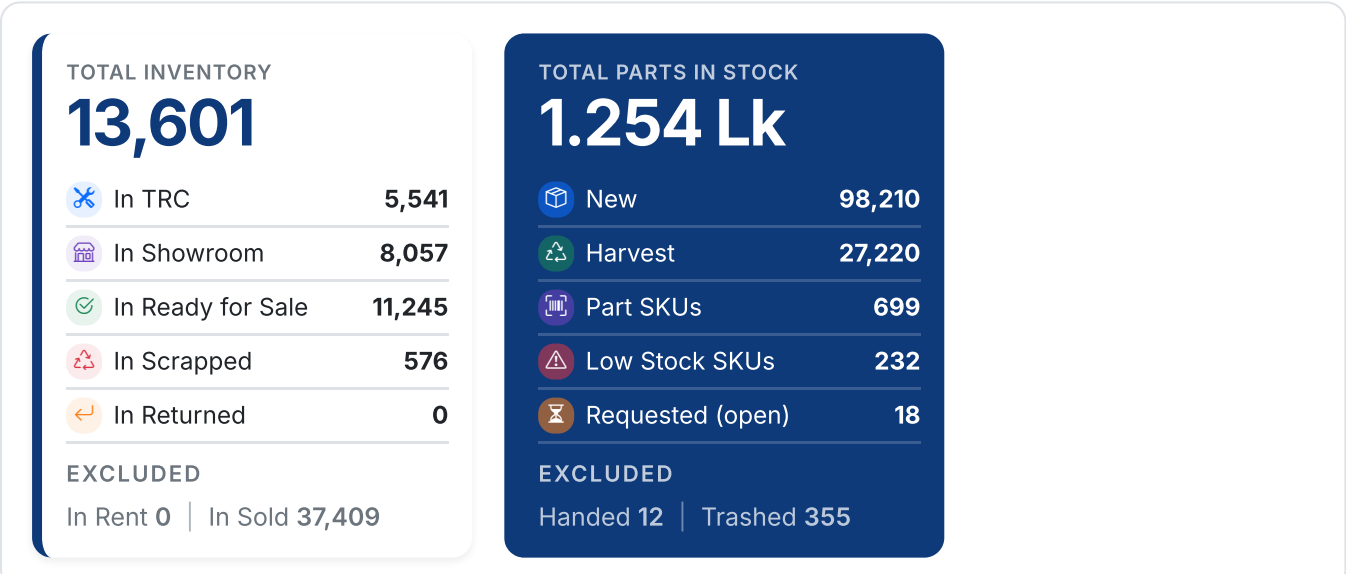

Light (left): a white card with a coloured left edge (default navy `#0e3a7a`). Dark (right, `variant='dark'`): the card filled with that colour, white text. Both have a small-caps title, a big total, a breakdown list (icon in a soft square, label, value) and a grey "Excluded" line in plain text with "|" separators. It sits at the left of a block of other tiles and stretches to their height. `rows = [(icon, label, value, colour)]`, `excluded = [(label, value)]`. Used for the Dashboard's Total Inventory and Total Parts in Stock.

Specification

Part	Spec
Colour	One variable, `--tc`, set by the macro from its colour argument. Pick the colour from what the tile counts (chapter 02, Tile colours).

Tint look	Background 8% of the colour over white; 1px border at 25%; coloured count; dark label `#343a40`; shadow.
Dark look	Solid colour background and border; white count and title; label at 88% white; no shadow.
Box	Radius 10px · padding `1rem 1rem .8rem` · min-height 96px · all tiles in a row stretch to the same height.
Text	Count 1.6rem, weight 700, one line, letter-spacing −1px · label .72rem, one line · title .8rem, weight 600 · secondary lines .75rem.
Large numbers NEW	Indian grouping (12,34,567). From 1 lakh up a count shows as **x.xxx Lk**, from 1 crore as **x.xxx Cr** (3 decimals); hovering shows the full figure. Jinja: `tile_num(n)` (the macros use it); JS: `oxtShort(n, rupee)`.
Watermark	Optional Bootstrap icon, 3.4rem, bottom-right, partly cut off: 10% of the colour (tint) or 20% white (dark).
Download	`download=URL` adds a small outline button at the bottom (`download_label`, default "Download"). Pass `None` when the user lacks the Export permission.
Link	`href=` makes the whole tile a link; it lifts 3px on hover.
Row	`<div class="oxt-row">`: flex row, gap .75rem, tiles share the width (min 150px) and wrap. Surface tiles use `oxt-row oxt-row-surface`.
Page hooks	`cls=` extra classes and `extra=` raw attributes on the tile; `count_attrs=` / `label_attrs=` on the count and label (multi: a third item in each part).

```
{% import "_tiles.html" as tl %}
<div class="oxt-row">
  {{ tl.single(devices_in_iqc, 'Devices in IQC', '#2F6DB5', 'bi-clipboard-check') }}
  {{ tl.single(pna, 'Total Tags in PNA', '#dc3545', 'bi-exclamation-triangle',
               download=pna_url if can_export else None, download_label='Summary') }}
  {{ tl.multi('Total Quantities', [[(qty_new, 'New')], [(qty_harvest, 'Harvest')]], '#0d6efd', 'bi-
boxes') }}
</div>
```

DO

Use the macros for every tile, one look per page. One count per label that names it ("Total Tags in L1/L2"). Tiles sit above the filter bar, in one row.

DON'T

Hand-write tile markup or add a new tile class, mix tint and dark on one page, or put tiles below the filter bar.


Retired: `lt-tile`, `pm-tile`, `hw-tile`, `prod-tile`, `inv-tile`, `dash-tile`, `part-tile`, `stat-card`, `sum-card` and the Double count tile. The Dashboard stage pipeline stays its own component.

06

Filters UPDATED

One set of filter fields for the whole app, used in the filter bar on a list page and in Global Card headers. Every field looks and behaves the same wherever it sits.




Filter bar



All Devices: 10 fields, so 6 per row, Apply / Reset at the right. Screenshot of the live page.


Rule	Detail
Place	Below the tiles and above the table, on the page (no box), with a Bluemonk Navy rule underneath: `<form method="get" class="filter-bar"><div class="filter-bar-row">…`
Width	Fields stretch to share the row, **max 200px each**. A checkbox (`filter-bar-check`) keeps its natural width. A date range never goes below 175px.
Rows	**Up to 8 filters:** one row. **9 or more:** 6 per row (automatic grid), Apply / Reset at the right of the first row. No class needed (`filter-bar-6` is retired).
Buttons	Last cell: **Apply** (`btn btn-primary btn-sm` , no icon) and **Reset** (`btn btn-outline-secondary btn-sm` , a link to the page with no filters).
Applying	Nothing applies on its own. Filters apply only when Apply is pressed, or Enter in a text box. (Card-header filters are different: they apply at once.)
Labels	No label above a field: each has a `title=` tooltip and a placeholder or an "All ..." first option.

Field types

Type	Look	Rules
1 · Dropdown single choice		A plain `<select class="form-select form-select-sm">` . With **4 or more items** (counting "All ...") it opens a menu with a **search box** (see below). The real select stays in the form, so the server and page scripts see no change.
2 · Date range NEW		One box replaces each From / To pair. Click one day = that day only; click two days = the range. × clears it. The two original inputs stay as hidden fields with the same names, so the server needs no change. A date box on its own uses the same box in single-day mode.
3 · Multi-select		`{{ ms.multiselect(name, label, options, selected) }}` from `_multiselect_filter.html` . Shows "2 selected"; All / Clear; search box with 4 or more options. Sends one comma-separated value.
4 · Search box scan-ready		Text box in `filter-bar-search` . Type, or scan a barcode (a scanner types and presses Enter, which applies). Same font as the other fields, never monospace.
5 · Checkbox		In `filter-bar-check` . Label normal weight, same font, size and colour as the fields.

Search in dropdowns NEW

- Any dropdown, single or multi, with **4 or more items** gets a search box at the top of its menu.
- Typing filters the list and highlights the first match.
- When **only one item matches it is picked automatically** (single: chosen; multi: ticked, and unticked again if the typing moves on to another single match).
- **Enter** picks the highlighted item (multi: ticks it, menu stays open) · ↑ ↓ move · Esc closes. Enter never submits the form from the menu.
- With a search typed, **All** ticks only the items showing.
- Opt out for one select: `data-no-search`.

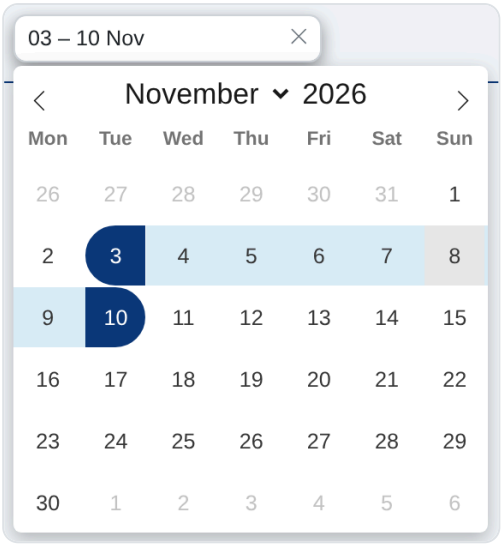


Calendar: Monday first, range in sky blue, ends in navy.

Date range text

Picked	Shows
One day	05 Nov 2026
Range this year	01 – 08 Nov · 28 Oct – 08 Nov
Range, other year	01 – 09 Mar 25
Across two years	28.12.25 – 08.01.26

The full dates are in the box's tooltip.

Filters in a card header



- Same five field types, same look, same search, as in the filter bar.
- **They apply at once** when changed (a text box on Enter or when you leave it). No Filter / Apply button: one in a header form is hidden automatically.
- A header with filters always has **one Reset: a grey icon-only button** (↻) right after the last filter. An existing Reset / Clear keeps its own action and is restyled; otherwise one is added.

Field specification


Part	Spec (filter bar and card header)
Box	White · 1px `#ced4da` border · **31px** high · **8px** corners · padding .25rem .5rem
Text	App font (never monospace) · 14px · weight 400 · `#212529` · placeholder 60% · text vertically centred
Menus	Open below the field, as wide as it, max 260–280px tall, scrolling with the search box fixed at the top
Building a page	Write plain `<select>`, `<input type="date">` pairs and the multiselect macro; the shared script turns them into the global fields. Don't auto-submit a filter bar, style a field by hand, add labels above fields, or build your own date picker or searchable dropdown.
Files	`static/js/filter-fields.js` (date range, search, card-header rules) · `static/vendor/flatpickr` (calendar, MIT) · `templates/_multiselect_filter.html` · `templates/_date_range_fields.html` · CSS in `app.css` (`.filter-bar`, `.dr-*`, `.ss-*`, `.ms-*`)

07


Global Card, Table and Tabs UPDATED

Three containers used together: the Global Card holds content, the Global Table lists records, Global Tabs switch between views. A table card is a Global Card with a Global Table inside.


Global Card

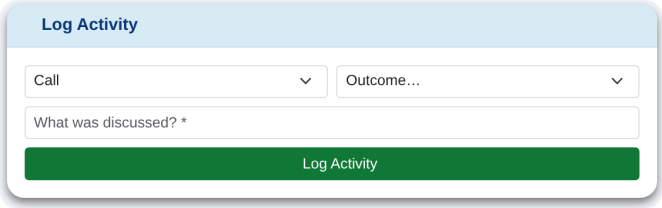

Title only

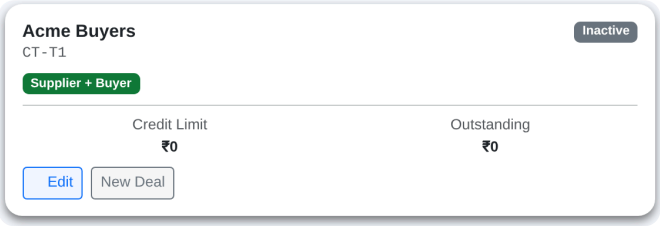


No header



Header with controls: title, toggle switches, dropdown filter, selected-count badge and buttons, all vertically centred



Coloured header kept (it carries meaning)




Under tabs: square top corners, light header

Part	Spec
Box	`card border-0 shadow-sm` · 16px corners · shadow `0 .25rem .5rem rgba(0,0,0,.5)` · white body, padding 1rem
Header	A header with no colour of its own (none, `bg-transparent`, `bg-white`, `bg-light`) turns Sky Blue `#d9ebf6` with a navy semi-bold title, padding .5rem 1rem. Coloured headers that carry meaning (e.g. red PNA) keep their colour. `card-plain` opts out.
Header content	Left: icon + title. Right: this card's filters (chapter 06) and buttons (chapter 08). Badges and switches are centred on the row.
Under tabs	First card in a tab pane: square top corners, header Light Colour `#f0f4f8`. A bordered tab content gets 16px bottom corners and the card shadow; the card inside has none.
Table inside	The table has 12px rounded corners top and bottom and no extra gap below it.

Global Table


`initGlobalTable('#id', dtOptions, opts)` wraps a server-side DataTable with the shared look and behaviour. Never hand-build a list table.

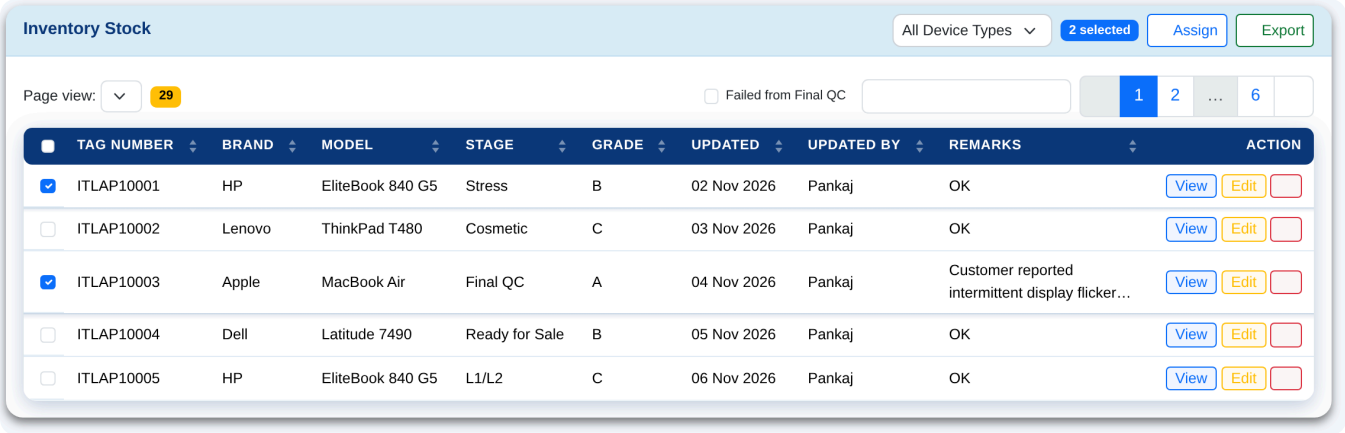


Checkbox selection with Search: dropdown filters, selected count and buttons in the card header; checkbox filter just before the search box.

Always on	Detail
Look	Navy `#0e3a7a` header row, white uppercase labels on one line, rounded ends; white rows with a thin `#e3eef7` divider; soft navy shadow
Columns	First column frozen when scrolling sideways (first two with a checkbox). The checkbox column is not sortable. Action column right-aligned, all buttons on one line.
Text	14px; cells stay on one line; 32+ characters clamp to 2 lines with the full value on hover
Toolbar	Left: "Page view" + yellow row-count badge. Right: search box + pagination. 12 rows per page. Built-in empty-state picture.
Toolbar filters	Checkbox filters sit just before the search box: square box, .4rem gap before the label

Setting (per table)	Options
Checkbox selection	Off · On (`opts.selectAll`): checkbox column first with Select All; Tag Number fixed with it
Search box	"Search" · "Scan or Search" (`opts.scan`): scanning a tag ticks its row
Placement (automatic)	In a card · in main tabs · in sub-tabs · without a card. Same padding everywhere; in a tab without a card body it adds its own.

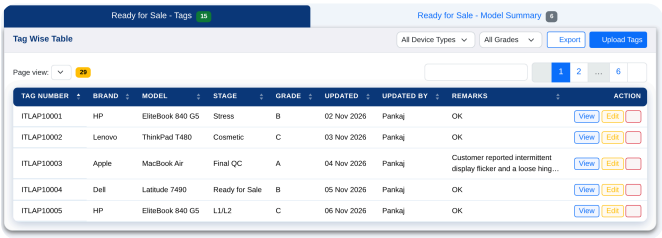


In main tabs (page level)

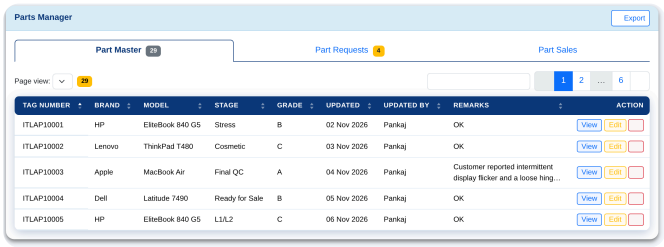


In sub-tabs (inside a card)

Global Tabs

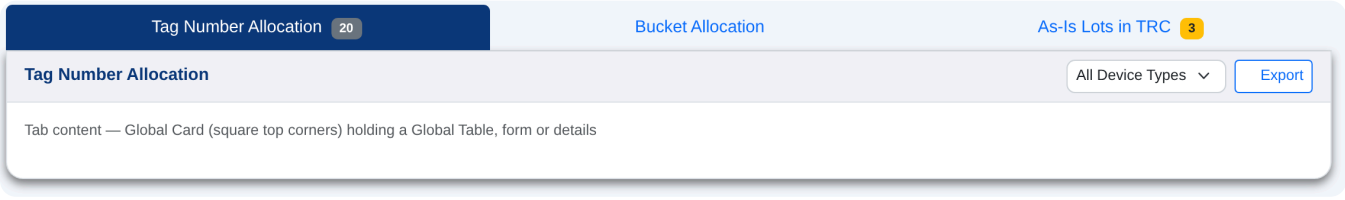


Global Tabs — pill tabs NEW

A compact tab row that sits on the card-header line, next to the card's title. Use it when one card's table has a few views — the page decides; nothing applies it on its own.



Inventory Manager → Return Stock: Received active (top), Completed active (bottom).

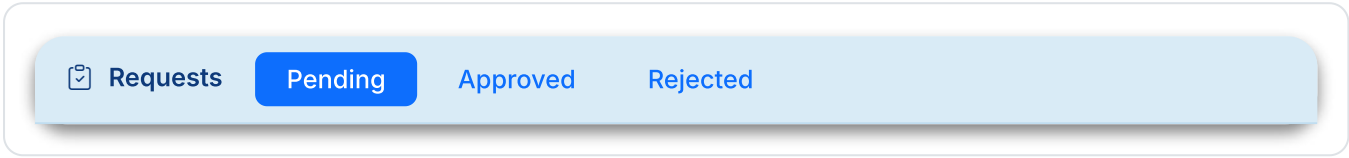


Live sample (app.css).

Part	Rule
Markup	`<ul class="nav pill-tabs">` with `.nav-link` buttons; the current one has `.active`. Put it right after the card title in the card header.
Active	Solid Primary pill (`--bs-primary`), white text, standard rounded corners.
Others	Plain Primary text — no box, border or underline. Hover: a faint Primary tint.
Size	Padding .25rem 1rem, weight 500 — no taller than the header's buttons, so the header keeps its height.
Labels	Short words; **no count badges** and no icons.

Pill tabs or Global Tabs?

	Pill tabs	Global Tabs (main / sub)
Switches	Views of **one** card's table (a filter): Received / Completed, Pending / Done	Between **different** panels or tables
Sits	Inside the card header, after the title	Full-width bar above a card, or inside a card body
Counts	None	Optional count badge after the label
Class	`.nav.pill-tabs`	`.nav-tabs` (`.main-tabs` / `.sub-tabs`)

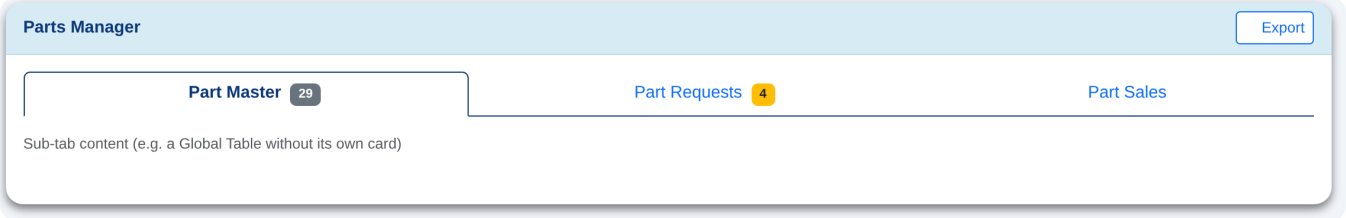

- Every tab bar spans the full width; tabs share the row, labels centred; optional icon before and count badge after the label.
- **Main tabs** (page level): **filled**, the active tab navy with white text. The card under them has square top corners, flush with the bar.
- **Sub-tabs** (a tab bar inside a card body, tab pane, pop-up or accordion): **outline**, the active tab white with a navy border and navy text.
- Picked automatically from where the bar sits. `.main-tabs` forces filled, `.sub-tabs` forces outline.

08

Buttons and badges UPDATED


Button hierarchy

Add Lot | Save | Pass | Export | Customise | Cancel

Delete | Fail | View details | Disabled

Use	Class	Examples
Main action	`btn btn-primary`	Add ..., Save, Apply
Positive step	`btn btn-success` (#0F7A37)	Pass, Move to Ready, Approve, Sell
Export NEW	`btn btn-outline-primary` on white, icon `bi-download`	Export, Export (61), Export GRN Summary. Always outline.
Supporting actions	`btn btn-outline-primary` on white	Customise, Login Log, Bulk Upload
Cancel / filter-bar Reset	`btn btn-outline-secondary`	Cancel, Back, Reset
Destructive	`btn-danger` / `btn-outline-danger`	Delete, Fail, Scrap. Always confirm first, with the count.

Card header buttons NEW

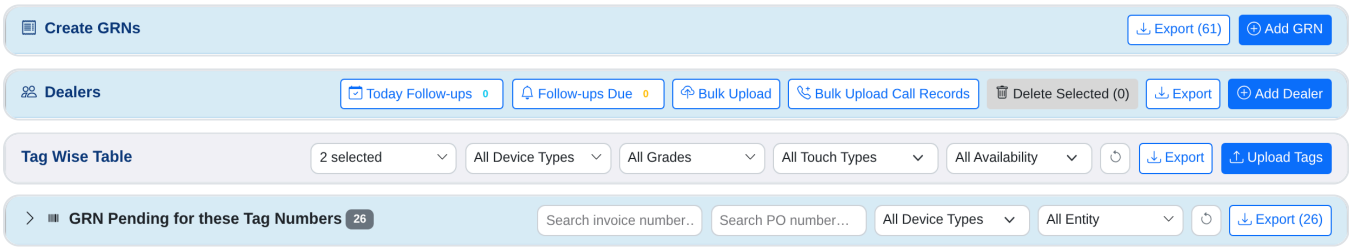

Add button primary and far right · Add wins over Upload · no Add: Upload is primary · no Add / Upload / Backup: no primary.

Rule	Detail
Primary	Only an **Add** button is primary (solid blue), and it sits at the **far right**. With no Add button, an **Upload** or **Backup** button is primary. Otherwise no button is primary. At most one primary per header.
Other buttons	Blue outline on white (`btn-outline-primary bg-white`). Red (Delete ...) stays red outline. On / off toggles (Split Entity) keep their own look.
Export	Always outline, icon `bi-download` .
Reset	Grey icon-only (↻), 31px square, right after the last filter (chapter 06). No Filter / Apply button in a card header.
Automatic	Applied by `filter-fields.js` to every plain card header. Opt out: `data-hdr-keep` on the card-header (Dashboard's Financial Summary). Coloured headers are left alone.

Add buttons NEW

Every add button, in page and card headers, says **Add ...** (never "New ..." or "Add New ...") and uses the circled plus icon: `<i class="bi bi-plus-circle me-1"></i>Add Deal` .

- **Size:** `btn-sm` everywhere except the submit button at the bottom of a full form.

- **Labels** are a verb + object ("Move to Final QC"), never wrap, and have an icon with `me-1`. Icon-only buttons need `title=`.
- **Disabled** is always grey `#D8D8D8` with dark text. Don't restyle it.

Badges


Active Pending Failed Inactive Cosmetic Completed Final QC 5 3,518

Badge	Rule
Stage	`badge bg-{{ device.stage_color }}` + `stage_label`; never chosen by hand
Status	Done/active green **#0F7A37** · pending yellow with `text-dark` · failed red · inactive grey
Counts	Notification: `badge rounded-pill bg-danger` · row count: yellow toolbar badge from the Global Table, not repeated in the card header

09

Forms, modals and feedback

Forms

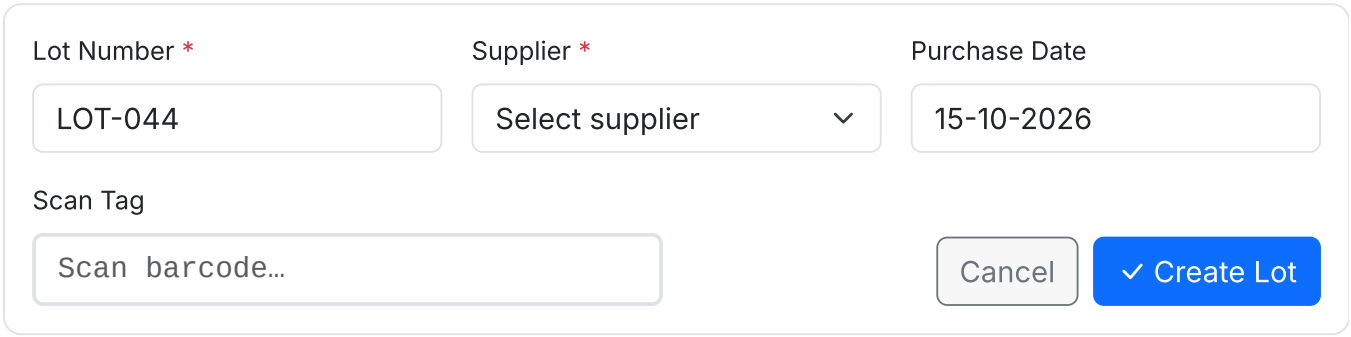


- `form-label` (0.875rem) above each field; required fields marked `<span class="text-danger">*</span>`.
- Fields in a Bootstrap grid (`row g-3` , `col-md-4`), grouped in cards by topic. `-sm` sizes inside filter bars, tables and modals.
- Barcode and tag inputs use `barcode-field` (Bluemonk Navy focus ring) and get focus on page load for scanners. The login page is the exception: no field auto-focuses.
- Money shows as ₹ with Indian grouping. Totals are calculated on the server, never in the browser (skill `server-side-financial-snapshot`).

Modals

All modals use the same frame: a white `modal-header` with an `h5.modal-title` (icon + title) and a close button, a `modal-body` , and a `modal-footer` with Cancel on the left of the main button.


Part	Rule
Size	Default (500px) for most forms · `modal-sm` for one field or a short confirmation · `modal-lg` for tables and long forms · add `modal-dialog-scrollable` when content can grow, `modal-dialog-centered` for confirmations
Header	White. `<h5 class="modal-title">` with a Bootstrap icon and `me-2` , then `btn-close` . The title names the action ("Assign Bucket"), not the page
Tinted header	Only to signal the type: `bg-primary bg-opacity-10` informational · `bg-warning bg-opacity-10` caution · `bg-danger bg-opacity-10` + `modal-title text-danger` destructive or defect
Body — fields	Context line first (`small text-muted` , e.g. "3 tag(s) selected"). Labels `form-label small fw-semibold` , required `*` in `text-danger` . Controls `-sm` ; two short fields side by side in `row g-2`
Body — no fields	Summary rows: label `text-muted small` + value in `<strong>` , so the user sees exactly what will happen before confirming
Errors	An `alert alert-danger small` at the top of the body, hidden (`d-none`) until the server returns an error. The modal stays open, the fields keep their values, the button is re-enabled. Mark the bad field `is-invalid` with `invalid-feedback`
Footer	Cancel `btn btn-outline-secondary` (`data-bs-dismiss="modal"`) left of the main `btn btn-primary` with icon. A secondary destructive action sits far left with `me-auto` . Informational modals have one OK/Close button
Behaviour	Disable the main button while saving. On success, close the modal and refresh the table (`ajax-partial-refresh`) or redirect with `?success=`

Alerts and feedback

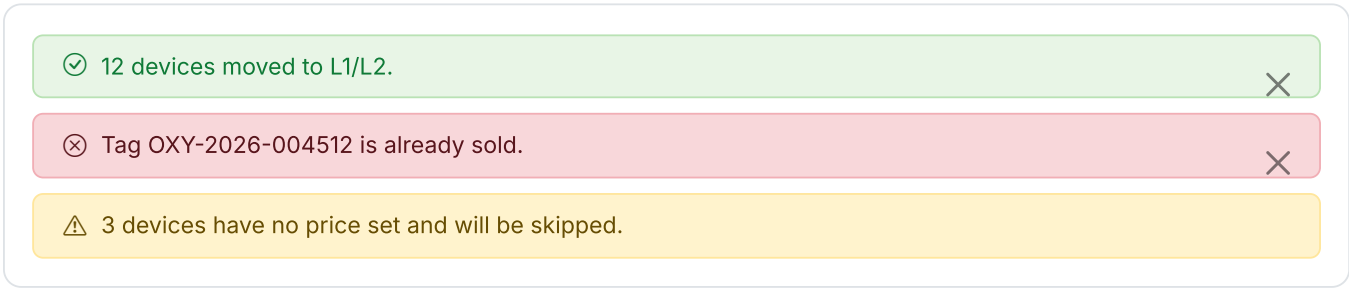

- After a form submit, redirect with `?success=` or `?error=`; the page shows a dismissible alert above its content.
- `alert-warning` for what the user must know before acting; `alert-info` for neutral guidance. One sentence, with the number.
- No alert for "no data": the Global Table's empty state covers it.
- **Close button.** Page alerts use `py-2`; add `.alert-dismissible.py-2 .btn-close { padding: .75rem 1rem; }` to `app.css` to centre the ×.

Upload result banner

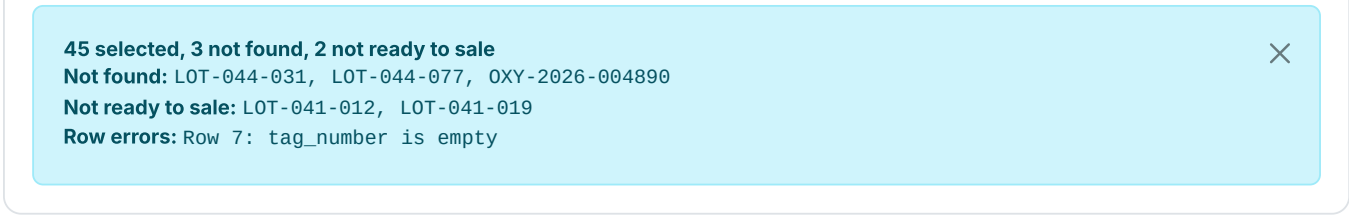

- Shown after **Bulk Upload Tags** on Ready to Sale (and other pages that tick rows from a CSV). The modal closes, the banner is added at the top of `<main>` and the page scrolls to it.
- `alert alert-info alert-dismissible small mb-3`. Bold summary line with every count, then one line per problem group with the tags in `font-monospace`.
- The one place an alert runs past one sentence: the user needs the exact tags to fix the file. It never auto-hides.

Upload results and errors

Bulk Lot, Device (IQC) and Spare Parts uploads save valid rows, skip and list bad ones, and review duplicates.

Part	Rule
Count alerts	Two side by side (`col-md-6`), not dismissible: rows inserted in `alert-success` ; rows with errors in `alert-warning` if any, else `alert-success` .
Error table	`table table-sm table-bordered small` , `table-warning` header, columns # and Error. Each message starts `Row N:` and names the field and bad value.
Actions	Back to List (`btn-primary`), Upload Another File (`btn-outline-secondary`).
Duplicate review	Opens by itself for repeated Tag Numbers or unknown lots. `modal-xl` , static backdrop; Update All and Skip and Submit left of the close button. Row actions are small outline buttons: Approve Move (primary), Update (warning), Add Lot (success).

10

Patterns

Showing and hiding by permission

A control the user can't use is hidden, not disabled. A control they can use must always render, including for custom roles that admins create (for example `trc_manager`).

Need	Use
Module, sidebar link, section	`has_perm(role,'<module>','enable')` + `not module_hidden('<module>')`; `any_perm()` for a section header
Role-specific button	`role_allowed(current_user.role, 'admin', 'sales_manager')`. It mirrors the server's `require_roles()` and lets custom roles through
Server side	Always re-checked with `require_roles` and `verify_csrf`. Hiding is for clarity, not security

```
{% if role_allowed(current_user.role,
      'admin', 'sales_manager') %}
  <button class="btn btn-success btn-sm">
    Approve</button>
{% endif %}
```

DON'T

`current_user.role.value in ['admin','sales_manager']`. Custom roles silently lose the button while the server would allow them.

Updating part of a page

When an action should refresh only a table or the tiles (for example a bulk assign in a modal):

1. The POST endpoint returns JSON when the request has `X-Requested-With: XMLHttpRequest`, and still redirects otherwise.
2. The page submits with `fetch()` + `FormData`, closes the modal, then calls `dt.ajax.reload(null, false)` (keeps the current page) or swaps the region by ID with `DOMParser`.
3. Re-attach event handlers in swapped HTML and refresh tile counts.
4. Without `fetch`, the normal form submit still works.

Page titles and breadcrumbs

- Admins rename any page in **Admin → Page Title Config**; the top bar shows the custom title, otherwise the template's `page_title`.
- Breadcrumbs are **off by default** (since 15 Oct 2026) and switched on per page in the same screen.

11

Checklist and change process

Design checklist for a new or changed page

✓	Check
☐	Extends `base.html`; sets `title` and `page_title`; sidebar link gated by `has_perm` with a `sidebar_label`
☐	Order: tiles → filter bar → alert → tabs → table card
☐	Tiles use the light-tint spec, with colours from the tile palette
☐	Filters use `filter-bar`: one row, `-sm` controls, `title=` instead of labels, Filter/Reset on the right
☐	Table uses `initGlobalTable` in a card with icon + title; actions in the last column
☐	Buttons follow the hierarchy; destructive ones confirm with a count
☐	Stage badges use `stage_color`; no unknown `bg-*` classes
☐	Greens use the OxyPC tokens (success `#0F7A37`), never Bootstrap's old #198754
☐	Role checks use `role_allowed()` / `has_perm()`, never a hard-coded list
☐	Works at 1366px; wide tables scroll inside the card
☐	No CDN links; any new library goes in `static/vendor/`

From change to production

#	Step	What happens
1	Database approval	A new table or column is drafted as `.dbml` and approved in dbdiagram.io before it is built.
2	Build and verify	Templates must parse. Run skill `verify-feature`; run `regression-sweep` if `base.html`, `app.css`, a macro or a Jinja global changed.
3	Staging	Changes go to the `staging` branch. Staging machines (Windows `RUN_STAGING.bat`, Mac `START_STAGING.command`) load it at `http://localhost:8001`; check with Ctrl+F5.
4	Approval	Pushed only after an explicit "push" for that batch. An earlier yes never carries over (`commit-deploy-gate`).
5	Production	Merge to GitHub `main` (`Bluemonk123/oxypc-inventory`). Production at `http://10.199.206.109` updates within 2–5 minutes.
6	Keep this document current	Edit `qa_docs/design_system/design_system.html` in the same change and rebuild the PDF.


12

Menus NEW

The app has two global menus. The **mega menu** is the top bar's +: every Add action a user may do, in sections. The **simple menu** is every other dropdown of links or actions, such as the profile menu. Filter dropdowns are a third, separate standard (chapter 06).

Menu	Used for	Look
Mega menu	Top-bar + (Quick Add)	Sections with blue headings and a line under each; several columns, filled top to bottom; first column under the button, more columns open to the left
Simple menu	Profile menu, row action menus, export / download menus — any `.dropdown-menu` of `.dropdown-item`s	One column, roomy rows, rounded light-blue hover, icons in a fixed column, dividers between groups
Filter dropdown	Single / multi select in filter bars and card headers	WorkID look: search box, All / Clear links, checkboxes (chapter 06)

Mega menu — the top-bar +

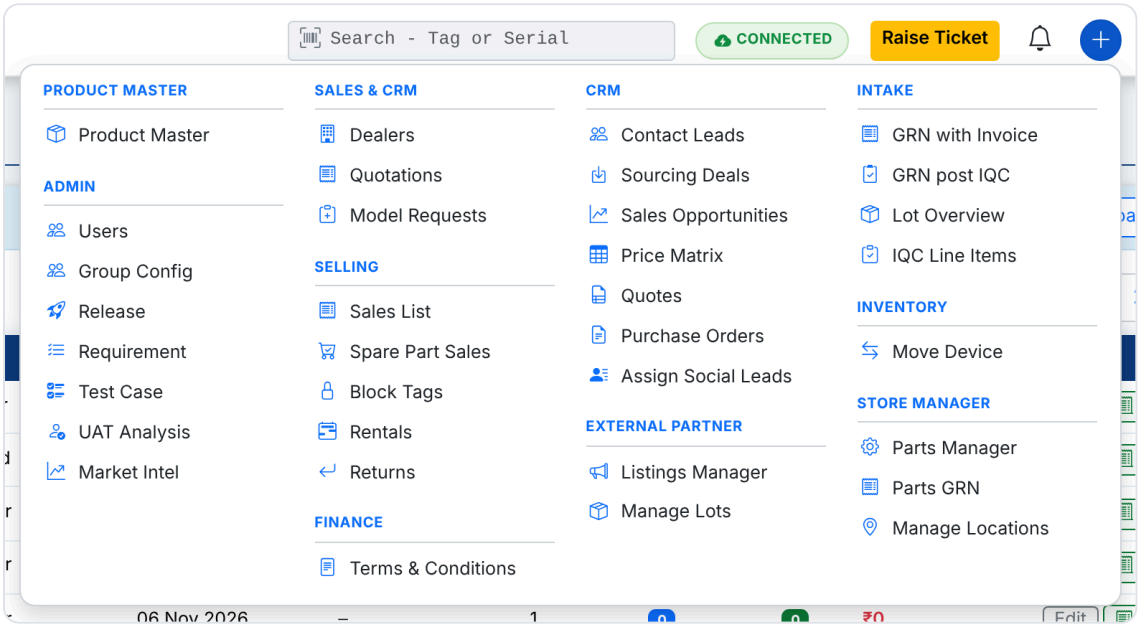


Admin: every Add action. The first column (Intake, Inventory, Store Manager) sits under the + button; the other columns open to its left.

Part	Rule
Button	Blue circle (`btn btn-primary rounded-circle` , 32 px, `bi-plus-lg`) right of the bell. **Hidden when the user has nothing to add.**
Which items	An item shows only when the role may open the module (Permission Matrix *enable*, module not hidden) **and** may add in it — `can(user, module, 'add')` , the same check as the page's own Add button (Price Matrix uses *pricing_add*). List: `services/quick_add.py` .
Names and sections	Taken from the **sidebar** in the browser: each item's label, icon and section are its sidebar link's, in sidebar order. Renaming a sidebar item (Sidebar Config) renames it here. Items with no sidebar link of their own keep their label and join the section of the link given in `SIDE` .

Columns	Whole sections go top to bottom, up to **10 rows** per column (a heading counts as a row), then the next column; at most **4 columns**, then columns get taller. A section never splits; a section longer than a column gets its own column. Column 1 is on the right, under the button (`flex-direction: row-reverse`). No vertical dividers.
Section heading	0.7rem, bold, upper case, letter-spacing .04em, **Primary blue** (same as the item icons), 1px line under it.
Spacing	Every section has the same 8 px above and below. Items 0.875rem, padding .38rem .6rem, radius 6px, icon in Primary blue, light-blue hover.
Opening an item	An item with its own page goes there (`/lots/new`). An item whose Add is a modal on a list page links to `/page#add=<button text>` ; `static/js/quick-add.js` clicks that Add button once the page has loaded and removes the hash.

A role with fewer rights

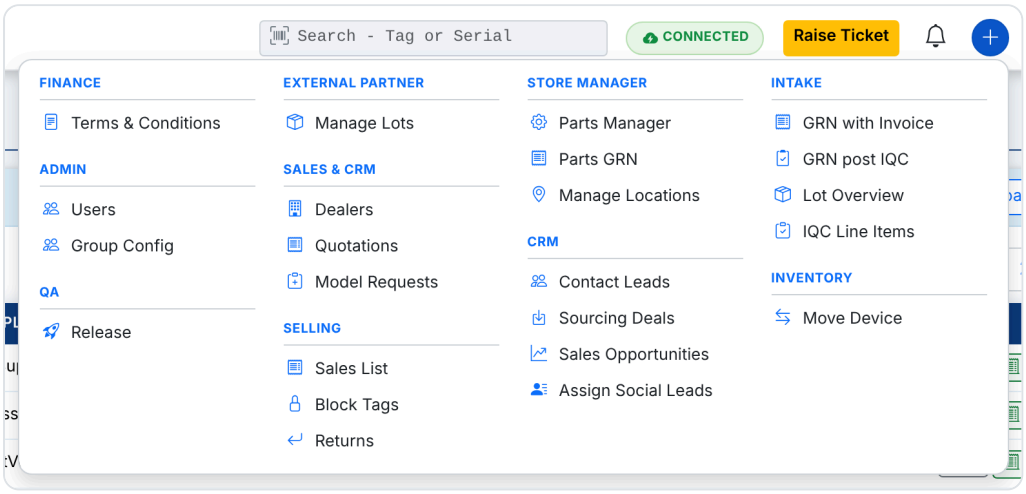


Same rules, fewer items. A user with only a few items gets one short column; a user with none gets no + button at all.


Adding an item to the + menu

- Add one line to `CATALOG` in `services/quick_add.py` : `(label, icon, url, module, action)` . The label and group are only fallbacks — the sidebar provides the real ones.
- If the Add opens a modal, use `/page#add=Add Thing` with the button's exact text. If the list page is not `url` minus `/new` , add it to `SIDE` .
- The module and action must be the ones the page's own Add button checks, so the menu never offers what the page would refuse.


Simple menu — every other dropdown

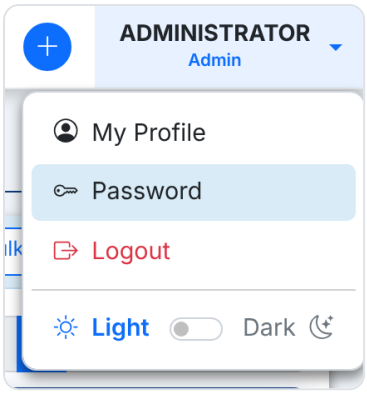

Profile menu, light mode, hovering Password.

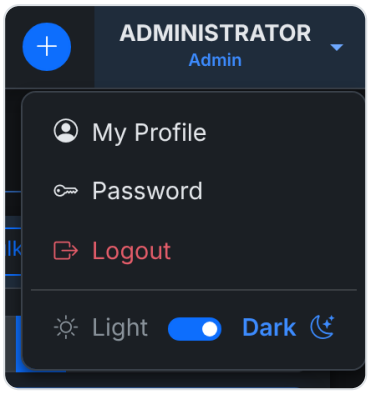

The same menu in dark mode.

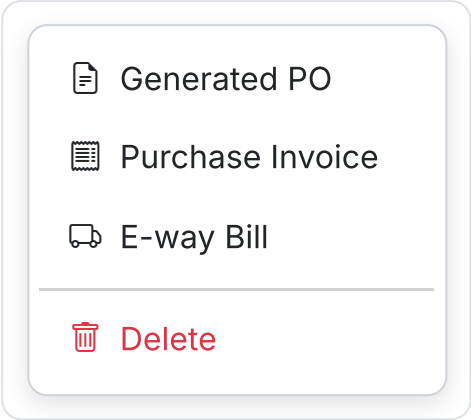

Live sample (app.css): a row action menu, destructive item last.

Part	Rule
Menu	Radius 10px, border `--oxy-border`, 0.35rem side padding, min-width 12rem.
Items	Padding .5rem .85rem, radius 6px, 2px between rows. Icon first, fixed 1.15rem wide, then `me-2` — every label starts at the same place.
Hover	Sky Blue `--oxy-sky` (dark mode: `--oxy-hover`). A `text-danger` item (Logout, Delete) gets a light red hover.
Groups	`dropdown-divider` between groups, .4rem above and below. Destructive items last.
How	Global — Bootstrap's `--bs-dropdown-*` variables set on `.dropdown-menu` in `app.css`. Write plain Bootstrap markup; no extra classes.

Profile menu

- Order: **My Profile**, **Password** (opens `/auth/profile#password` at the Reset Password card), **Logout**; then a divider and the **Light ⟷ Dark** switch as the footer.
- The switch names both modes; the current one is bold Primary blue, the other grey. Each user's choice is kept in the `oxy_theme` cookie; the admin sets the default in Master Data → System Colors.

> **DO**
> Use the simple menu for any list of links or actions. Keep labels short, icon first, destructive actions last in red.

> **DON'T**
> Add search boxes, card-header colour or vertical dividers to the + menu, or build a one-off dropdown style on a page.

APPENDIX A

Token and file reference

CSS variables (`app.css :root`) UPDATED

Variable	Value	Purpose
`--sidebar-width`	240px	Sidebar width
`--sidebar-text`	#f0f4f8	Sidebar link text (same as page background)
`--sidebar-active`	#0377c2	Active sidebar link
`--brand-blue`	#0e3a7a	History buttons, focus, brand (was #0377c2)
`--oxy-leaf` / `--oxy-forest`	#54BA48 / #129042	OxyPC greens: accents / profit
`--oxy-text` / `--bs-success`	#0F7A37	Success: buttons, badges, green text, tiles
`--oxy-mint`	#E8F5E6	Green tile / stat-card background
`--topbar-height`	56px	Top bar height
`--app-zoom`	0.9	Global UI scale
`--full-vh`	calc(100vh / var(--app-zoom))	Use instead of 100vh

Shared classes

Class	What it does
`filter-bar` , `filter-bar-row` , `filter-bar-search` , `filter-bar-check` , `filter-bar-6`	Filter bar layout
`gtable` , `gtable-card` , `gtable-top` , `gtable-cards`	Global Table (added by `initGlobalTable`); `gtable-cards` = Bluemonk Navy header, row shadows
`gtable-last-col-text`	Last column is text: left-aligned and wraps
`gtable-clamp2`	Two-line clamp with tooltip, 160–260px wide
`bg-teal` , `bg-purple` , `bg-pink`	Custom badge colours
`barcode-field`	Monospace scan input with Bluemonk Navy focus ring
`card-hover`	Lift-on-hover for clickable KPI cards
`profit-positive` / `-negative` / `-zero`	P&L colours (#129042 / #d63031 / #888)
`prod-tile*` , `inv-tile*` , `pm-tile*`	Page-level tile classes (light-tint, light-tint, solid)

Jinja globals for UI

Global	Use
`has_perm(role, module, action)`	Module permission check
`any_perm(role, *modules)`	Show a section if any module is allowed
`role_allowed(role, *roles)`	Role check that is safe for custom roles
`module_hidden(key)`	Master Data global visibility
`sidebar_label(key, default)`	Admin-renamable sidebar text
`resolve_page_title(path)` , `breadcrumb_enabled(path)`	Page Title Config
`app_version()`	Version shown on the login page and sidebar footer

Where things live

Path	Contents
`templates/base.html`	Sidebar, top bar, alerts, breadcrumbs, script includes
`static/css/app.css`	All shared overrides, colour tokens

`static/js/global-table.js`	`initGlobalTable`
`static/img/` logo files	Box logo, Dark and Light versions and favicon (browser tab, login page, sidebar header)
`static/vendor/`	Bootstrap 5, Bootstrap Icons, DataTables, Chart.js (local copies)
`templates_config.py`	Jinja globals, asset versioning
`models/device.py`	`STAGE_COLORS`
`qa_docs/design_system/`	This document's source (`design_system.html`) and PDF builder
`.claude/skills/`	Project workflows: verify-feature, regression-sweep, commit-deploy-gate, custom-role-permissions, ajax-partial-refresh